

Washable filtration cartridges

STAINLESS STEEL AISI 316 PLEATED CARTRIDGE

A485PS

[Download technical drawing PDF](#) 

TECHNICAL FEATURES

| | |
|----------------|--|
| Type | A485PS |
| Type | AISI 316 pleated |
| Height | 9" 3/4 |
| Micron | 5 |
| Efficiency | 85% |
| Hot sanitizing | Yes - Refer to Everblue for technical info |

MATERIAL

| | |
|---------------------|---|
| Filtration material | AISI 316 stainless steel |
| Internal core | AISI 316 stainless steel (1 mm thickness) |
| External core | None |

PRESSURE

| | |
|--|-------|
| Max differential pressure at 20°C | 3 bar |
| Recommended change-out differential pressure | 1 bar |

TEMPERATURE

| | |
|-------------------------|-------|
| Max working temperature | 160°C |
|-------------------------|-------|

SCOPE OF USE

| |
|-------|
| Water |
|-------|



Approximate picture. End caps and height's choice will lead to the assembly of a product which could differ from those shown in figure

| Code | Height | Micron | Flow l/h | Filtering surface | Minimum quantity | Euro/each |
|---------------|--------|--------|----------|---------------------|------------------|-----------------------|
| A485PS0905STN | 9" 3/4 | 5 | 700 | 0,16 m ² | 4 | Login |

Washable filtration cartridges

STAINLESS STEEL AISI 316 PLEATED CARTRIDGE

A485PS

END CAPS LIST

| | |
|-----------------|----------------|
| End Caps | DOE (Standard) |
| CODE | ST |



CARTRIDGES CODE LIST

| Model | Height | Micron | Connection | Seals |
|--------|--------------|---------|----------------------|---|
| A485PS | 9" 3/4 09 | 5 05 | DOE (Standard) ST | NBR N Other available orings EPDM Silicone Teflon Viton E S T V |

* standard o-ring


Washable filtration cartridges

STAINLESS STEEL AISI 316 PLEATED CARTRIDGE

A485PS

FLOW RATE VS PRESSURE DIFFERENTIAL

Pressure differential

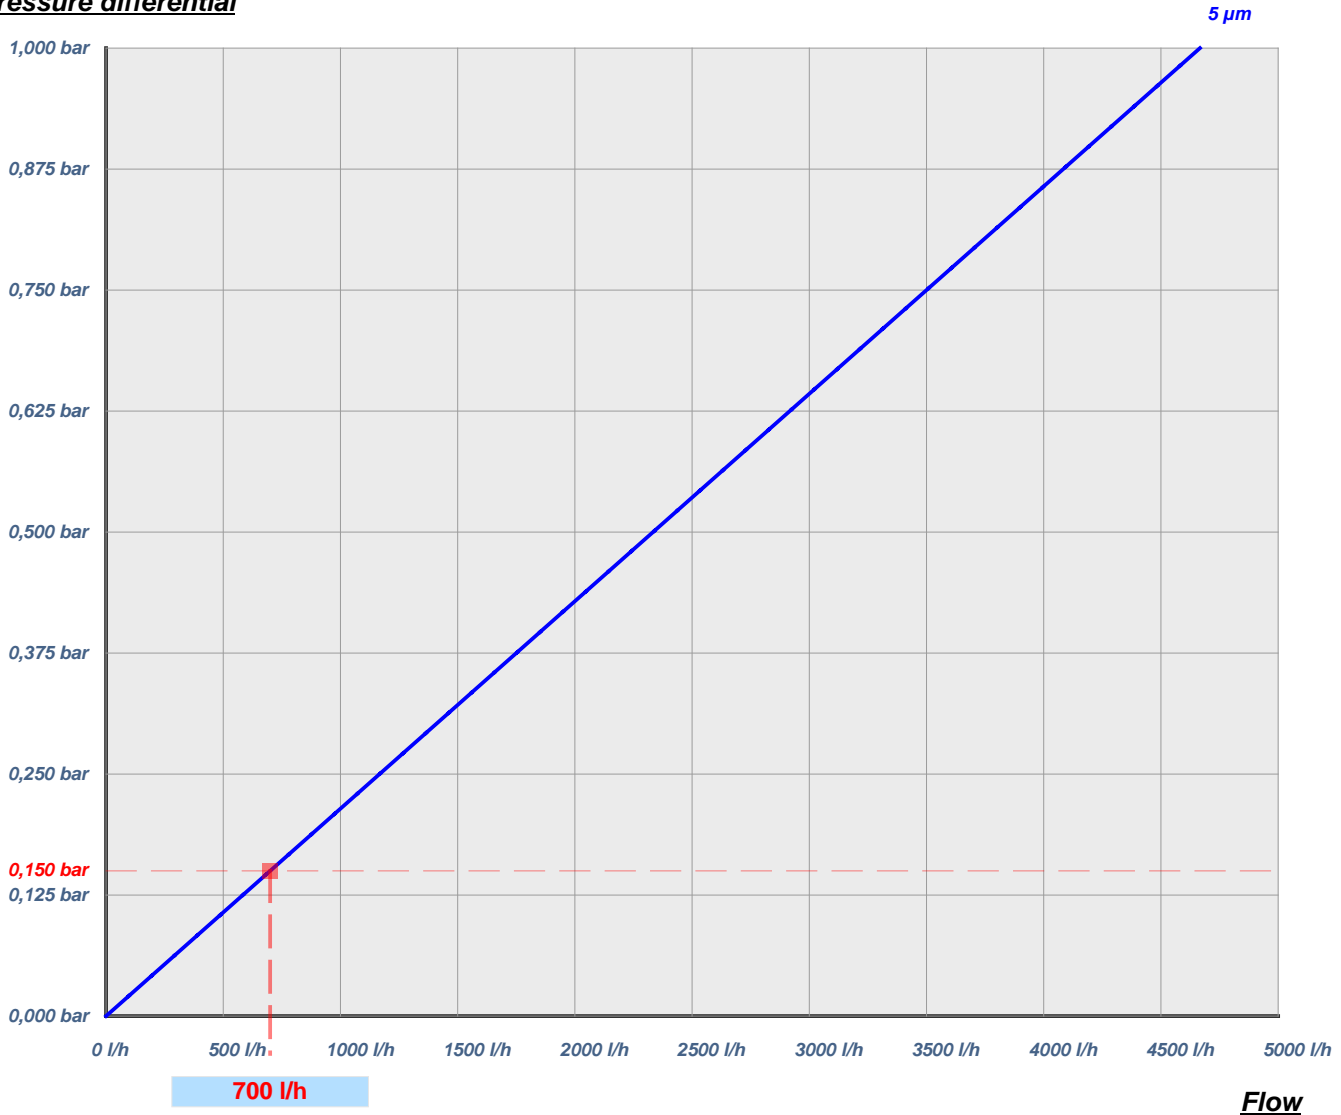

Graphic refers to 9" 3/4 height cartridges. Make the correct proportion to obtain flow for taller cartridges.