

Washable filtration cartridges

STAINLESS STEEL AISI 316 CARTRIDGE

A485S

[Download technical drawing PDF](#) 

TECHNICAL FEATURES

Type	A485S
Type	AISI 316 cylindrical
Height	9" 3/4
Micron	5
Efficiency	85%
Hot sanitizing	Yes - Refer to Everblue for technical info

MATERIAL

Filtration material	AISI 316 stainless steel
Internal core	AISI 316 stainless steel (1 mm thickness)
External core	None

PRESSURE

Max differential pressure at 20°C	3 bar
Recommended change-out differential pressure	1 bar

TEMPERATURE

Max working temperature	160°C
-------------------------	-------

SCOPE OF USE

Water



Approximate picture. End caps and height's choice will lead to the assembly of a product which could differ from those shown in figure

Code	Height	Micron	Flow l/h	Filtering surface	Minimum quantity	Euro/each
A485S0905STN	9" 3/4	5	500	0,05 m ²	4	Login

Washable filtration cartridges

STAINLESS STEEL AISI 316 CARTRIDGE

A485S

END CAPS LIST

End Caps	DOE (Standard)
CODE	ST



CARTRIDGES CODE LIST

Model	Height	Micron	Connection	Seals
A485S	9" 3/4	5	DOE (Standard)	NBR
	09	05	ST	N
				Other available orings EPDM Silicone Teflon Viton
				E S T V

* standard o-ring


Washable filtration cartridges

STAINLESS STEEL AISI 316 CARTRIDGE

A485S

FLOW RATE VS PRESSURE DIFFERENTIAL

Pressure differential

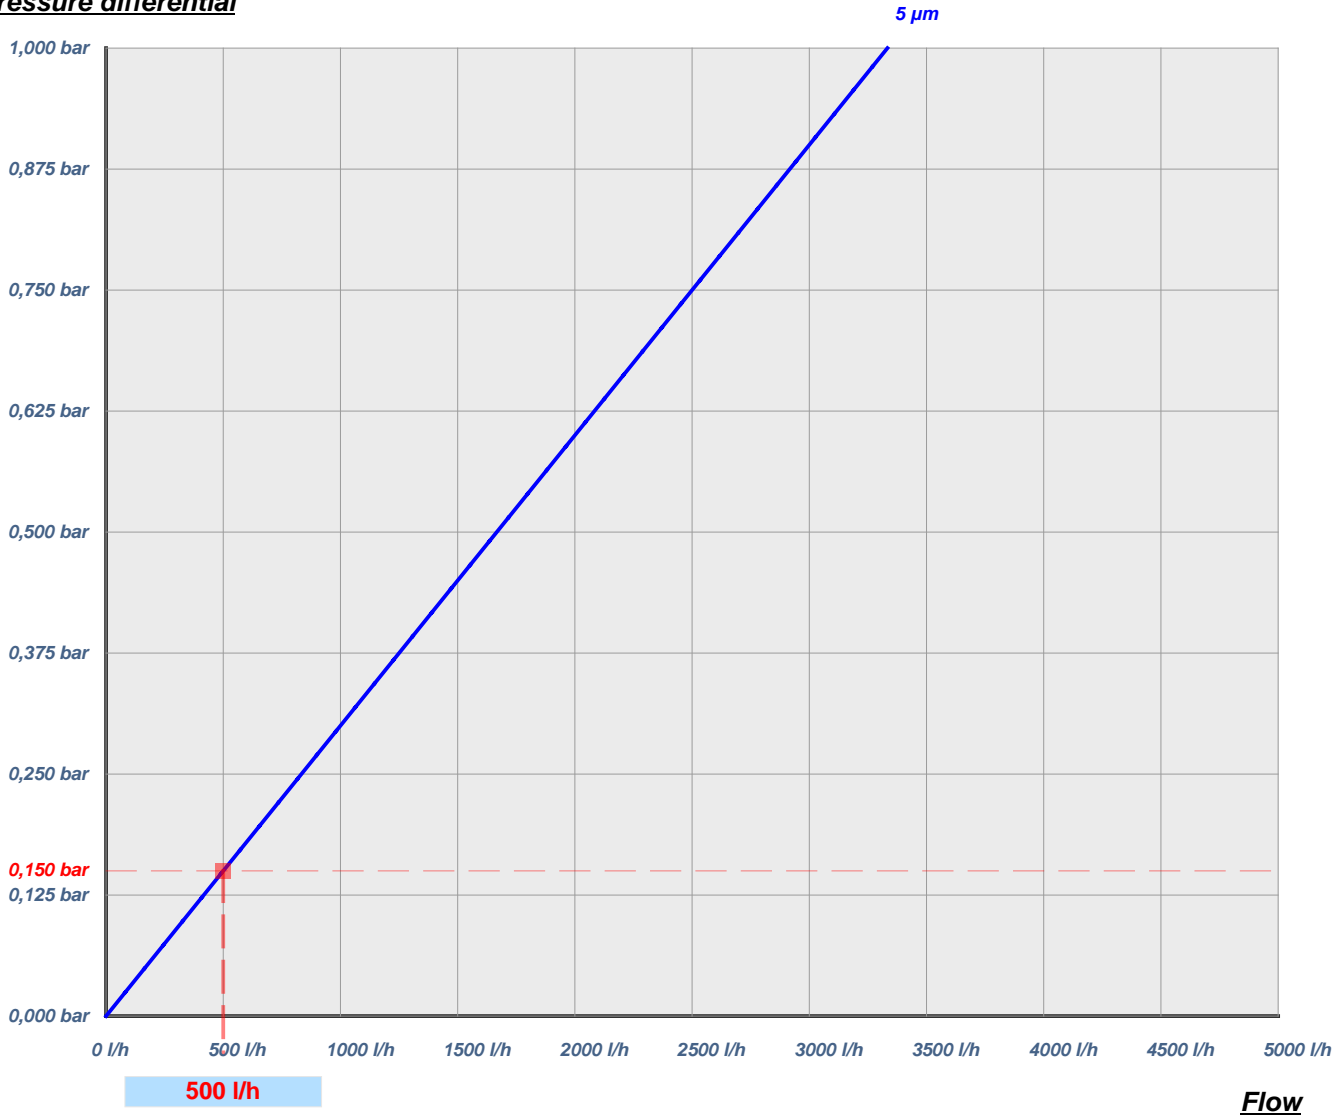

Graphic refers to 9" 3/4 height cartridges. Make the correct proportion to obtain flow for taller cartridges.