

Depth filtration cartridges

POLYPROPYLENE MELT BLOWN CARTRIDGE

N95BHF

[Download technical drawing PDF](#) 

TECHNICAL FEATURES

Type	N95BHF
Type	Melt Blown
Height	9" 3/4 - 20"
Micron	1 / 5 / 10 / 20 / 50
Efficiency	95%
Hot sanitizing	No

MATERIAL

Filtration material	Polypropylene
Internal core	None
External core	None

PRESSURE

Max differential pressure at 20°C	2 bar
Recommended change-out differential pressure	1 bar

TEMPERATURE

Max working temperature	80°C
-------------------------	------

SCOPE OF USE

Water
Sea water



Approximate picture. End caps and height's choice will lead to the assembly of a product which could differ from those shown in figure

Code	Height	Micron	Flow l/h	¹	Filtering surface	Quantity box	Euro/each
N95BHF0901BHF	9" 3/4	1-10	3.000		0,08 m ²	24	Login
N95BHF0905BHF	9" 3/4	5-20	4.500		0,08 m ²	24	Login
N95BHF0910BHF	9" 3/4	10-20	4.500		0,08 m ²	24	Login
N95BHF0920BHF	9" 3/4	20-50	4.500		0,08 m ²	24	Login
N95BHF0950BHF	9" 3/4	50-90	4.500		0,08 m ²	24	Login
N95BHF2001BHF	20"	1-10	6.000		0,16 m ²	12	Login
N95BHF2005BHF	20"	5-20	9.000		0,16 m ²	12	Login
N95BHF2010BHF	20"	10-20	9.000		0,16 m ²	12	Login
N95BHF2020BHF	20"	20-50	9.000		0,16 m ²	12	Login
N95BHF2050BHF	20"	50-90	9.000		0,16 m ²	12	Login

Depth filtration cartridges

POLYPROPYLENE MELT BLOWN CARTRIDGE

N95BHF

1 Max water flow rate at 20°C and differential pressure 0,15 bar

END CAPS LIST

End Caps	FilterBig
CODE	BHF



CARTRIDGES CODE LIST

Model	Height	Micron	Connection	Seals
N95BHF	9" 3/4 20"	09 20	1-10 5-20 10-20 20-50 50-90	01 05 10 20 50
			FilterBig	BHF


Depth filtration cartridges

POLYPROPYLENE MELT BLOWN CARTRIDGE

N95BHF

FLOW RATE VS PRESSURE DIFFERENTIAL

Pressure differential

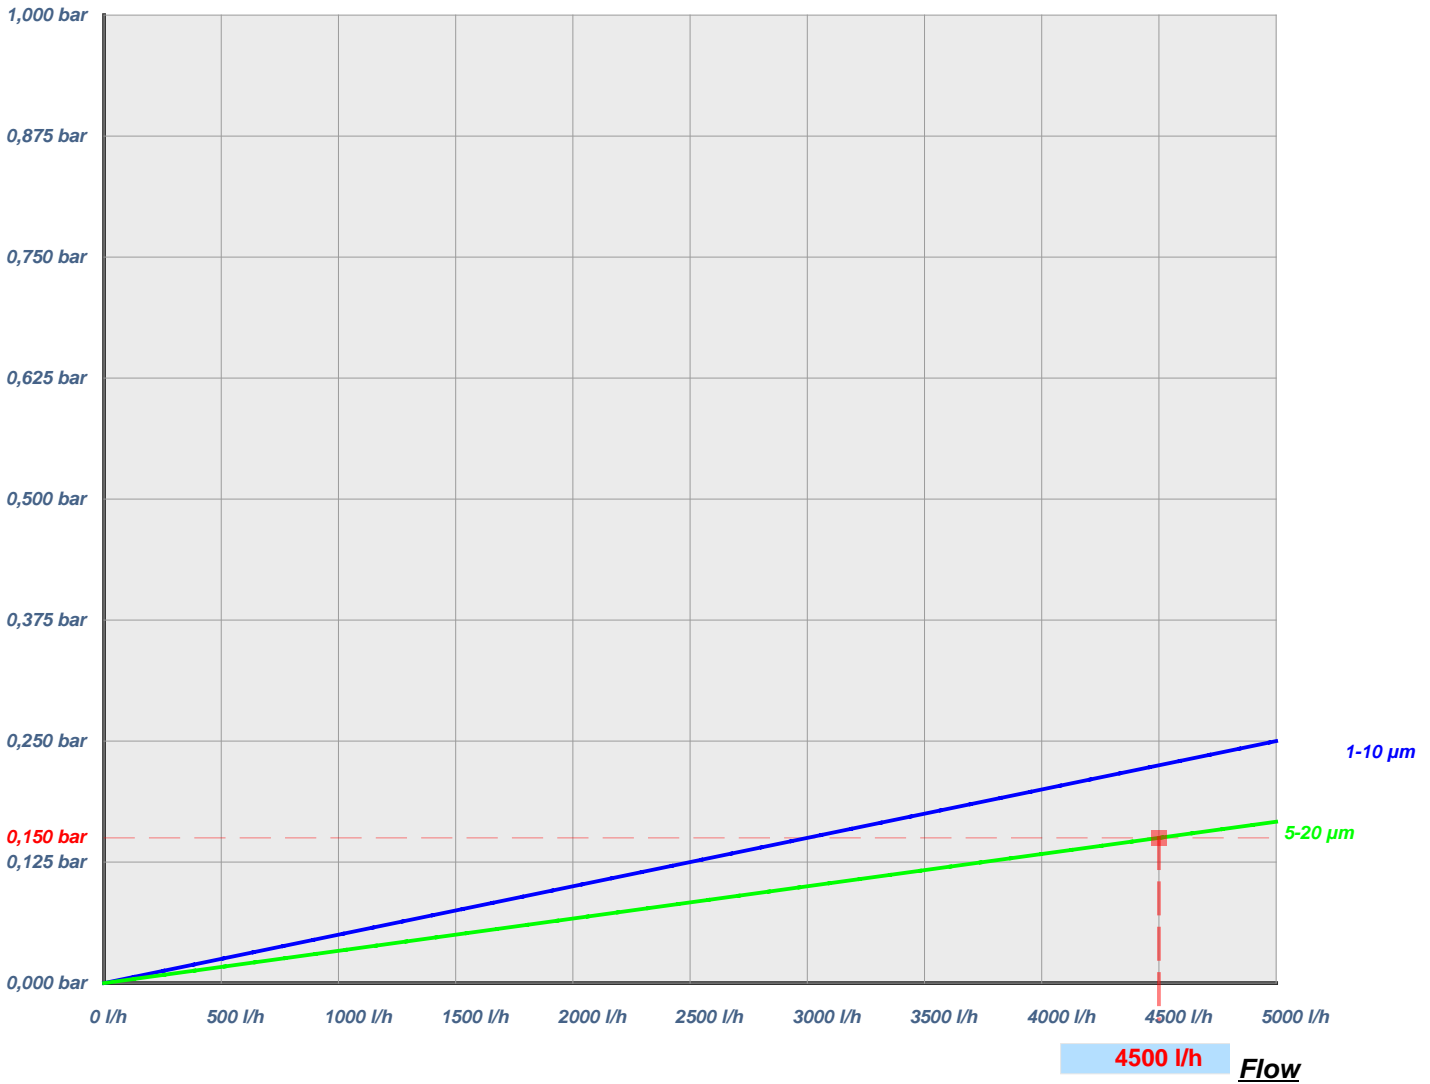

Graphic refers to 9" 3/4 height cartridges. Make the correct proportion to obtain flow for taller cartridges.