

## Depth filtration cartridges

# POLYPROPYLENE MELT BLOWN CARTRIDGE

## N95BHF

[Download technical drawing PDF](#) 

### TECHNICAL FEATURES

Type	N95BHF
Type	Melt Blown
Height	9" 3/4
Micron	1
Efficiency	95%
Hot sanitizing	No

### MATERIAL

Filtration material	Polypropylene
Internal core	None
External core	None

### PRESSURE

Max differential pressure at 20°C	2 bar
Recommended change-out differential pressure	1 bar

### TEMPERATURE

Max working temperature	80°C
-------------------------	------

### SCOPE OF USE

Water
Sea water



*Approximate picture. End caps and height's choice will lead to the assembly of a product which could differ from those shown in figure*

Code	Height	Micron	Flow l/h	Filtering surface	Quantity box	Euro/each
N95BHF0901BHF	9" 3/4	1-10	3.000	0,08 m <sup>2</sup>	24	<a href="#">Login</a>

## Depth filtration cartridges

# POLYPROPYLENE MELT BLOWN CARTRIDGE

## N95BHF

### END CAPS LIST

End Caps	FilterBig
CODE	BHF



### CARTRIDGES CODE LIST

Model	Height	Micron	Connection	Seals
N95BHF	9" 3/4 09	1-10 01	FilterBig BHF	


## Depth filtration cartridges

# POLYPROPYLENE MELT BLOWN CARTRIDGE

## N95BHF

### FLOW RATE VS PRESSURE DIFFERENTIAL

#### Pressure differential

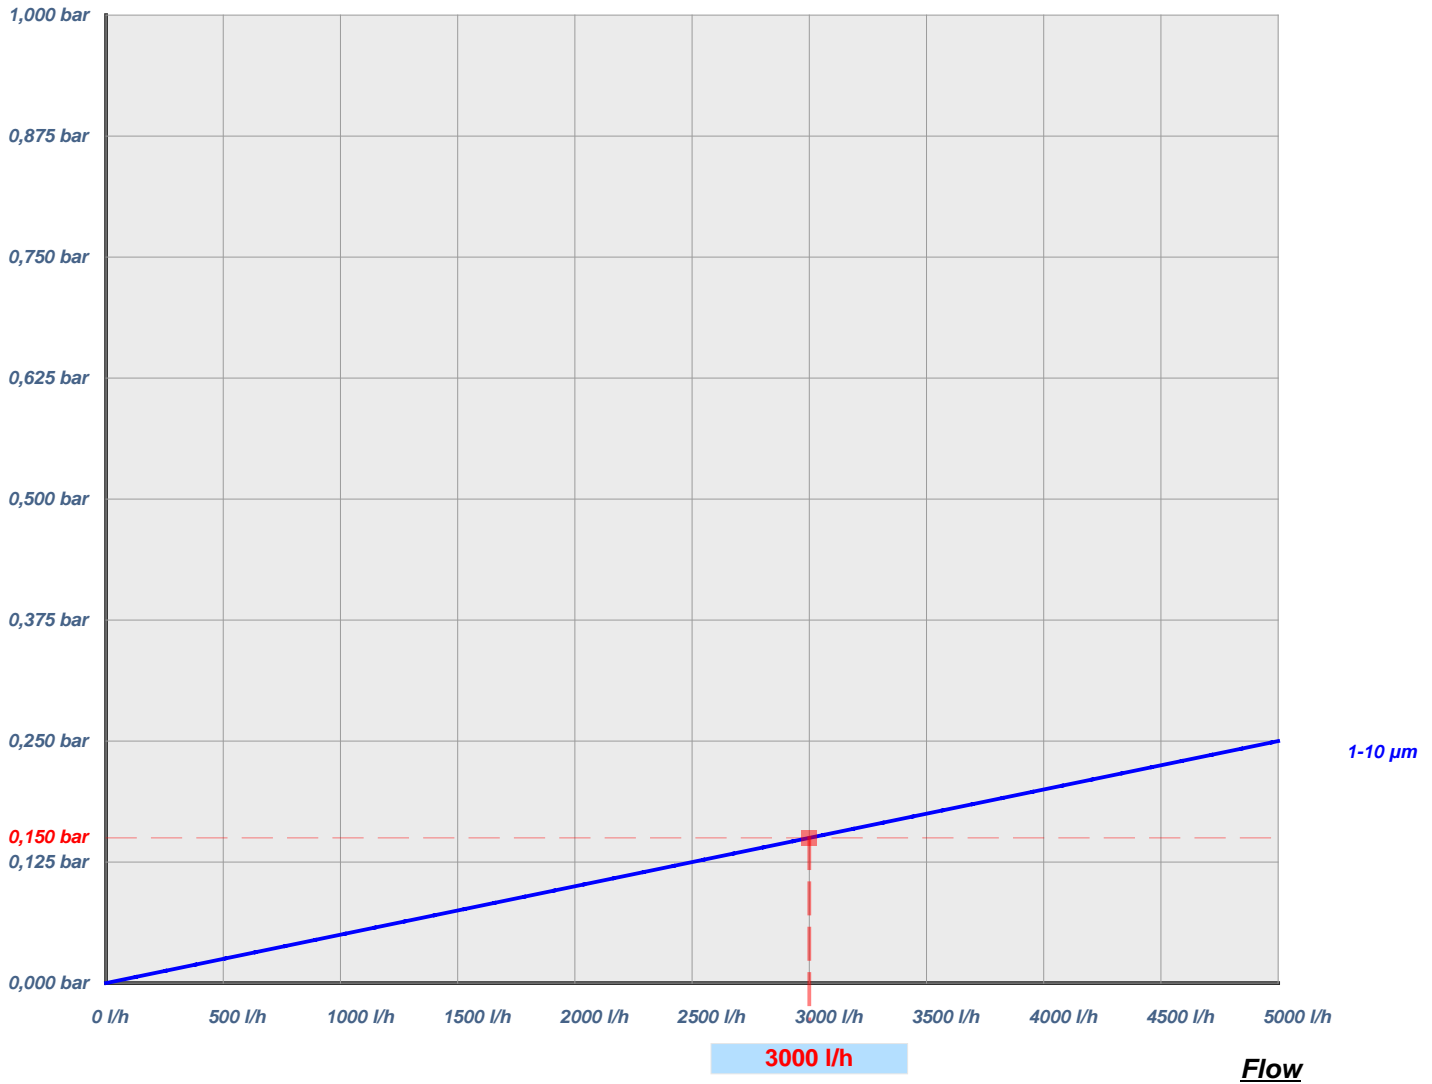

Graphic refers to 9" 3/4 height cartridges. Make the correct proportion to obtain flow for taller cartridges.