

Depth filtration cartridges

POLYPROPYLENE MELT BLOWN CARTRIDGE

N95CLDG

[Download technical drawing PDF](#) 

TECHNICAL FEATURES

Type	N95CLDG
Type	Melt Blown
Height	20"
Micron	1
Efficiency	95%
Hot sanitizing	No

MATERIAL

Filtration material	Polypropylene
Internal core	None
External core	None

PRESSURE

Max differential pressure at 20°C	2 bar
Recommended change-out differential pressure	1 bar

TEMPERATURE

Max working temperature	50°C
-------------------------	------

SCOPE OF USE

Water
Sea water



Approximate picture. End caps and height's choice will lead to the assembly of a product which could differ from those shown in figure

Code	Height	Micron	Flow l/h	Filtering surface	Quantity box	Euro/each
N95CLDG2001CL	20"	1-10	6.000	0,24 m ²	2	Login

Depth filtration cartridges

POLYPROPYLENE MELT BLOWN CARTRIDGE

N95CLDG

END CAPS LIST

End Caps	DOE CL
CODE	CL




CARTRIDGES CODE LIST

Model	Height		Micron		Connection		Seals	
N95CLDG	20"	20	1-10	01	DOE CL	CL		

Depth filtration cartridges POLYPROPYLENE MELT BLOWN CARTRIDGE N95CLDG

FLOW RATE VS PRESSURE DIFFERENTIAL

Pressure differential

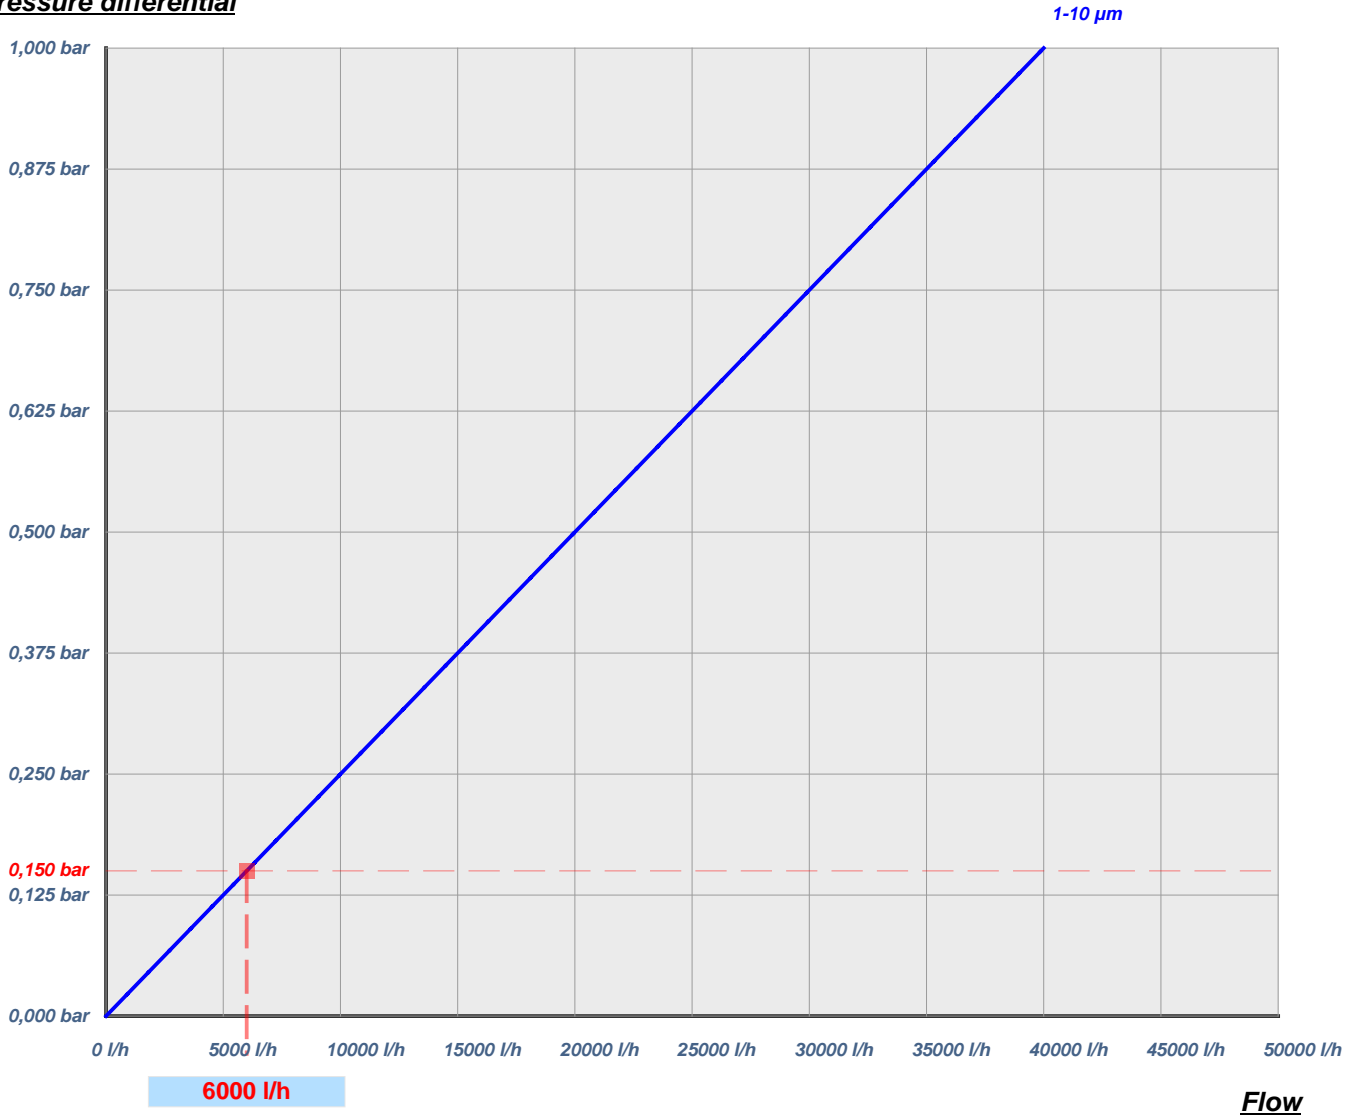

Graphic refers to 20" height cartridges. Make the correct proportion to obtain flow for taller cartridges.