

## Depth filtration cartridges

# POLYPROPYLENE MELT BLOWN CARTRIDGE

## N95FON

[Download technical drawing PDF](#) 

### TECHNICAL FEATURES

Type	N95FON
Type	Melt Blown
Height	23"
Micron	1
Efficiency	95%
Hot sanitizing	No

### MATERIAL

Filtration material	Polypropylene
Internal core	Polypropylene
External core	None

### PRESSURE

Max differential pressure at 20°C	2 bar
Recommended change-out differential pressure	1 bar

### TEMPERATURE

Max working temperature	50°C
-------------------------	------

### SCOPE OF USE

Water
Sea water



*Approximate picture. End caps and height's choice will lead to the assembly of a product which could differ from those shown in figure*

Code	Height	Micron	Flow l/h	Filtering surface	Quantity box	Euro/each
N95FON2301FONS	23"	1-10	10.000	0,27 m <sup>2</sup>	1	<a href="#">Login</a>

## Depth filtration cartridges

# POLYPROPYLENE MELT BLOWN CARTRIDGE

## N95FON

### END CAPS LIST

<b>End Caps</b>	FON
<b>CODE</b>	FON



### CARTRIDGES CODE LIST


Model	Height		Micron		Connection		Seals	
N95FON	23"	23	1-10	01	FON	FON	Silicone	S
							Other available orings	
							EPDM	E
							NBR	N
							Teflon	T
							Viton	V

\* standard o-ring

# Depth filtration cartridges POLYPROPYLENE MELT BLOWN CARTRIDGE N95FON

## FLOW RATE VS PRESSURE DIFFERENTIAL

### Pressure differential

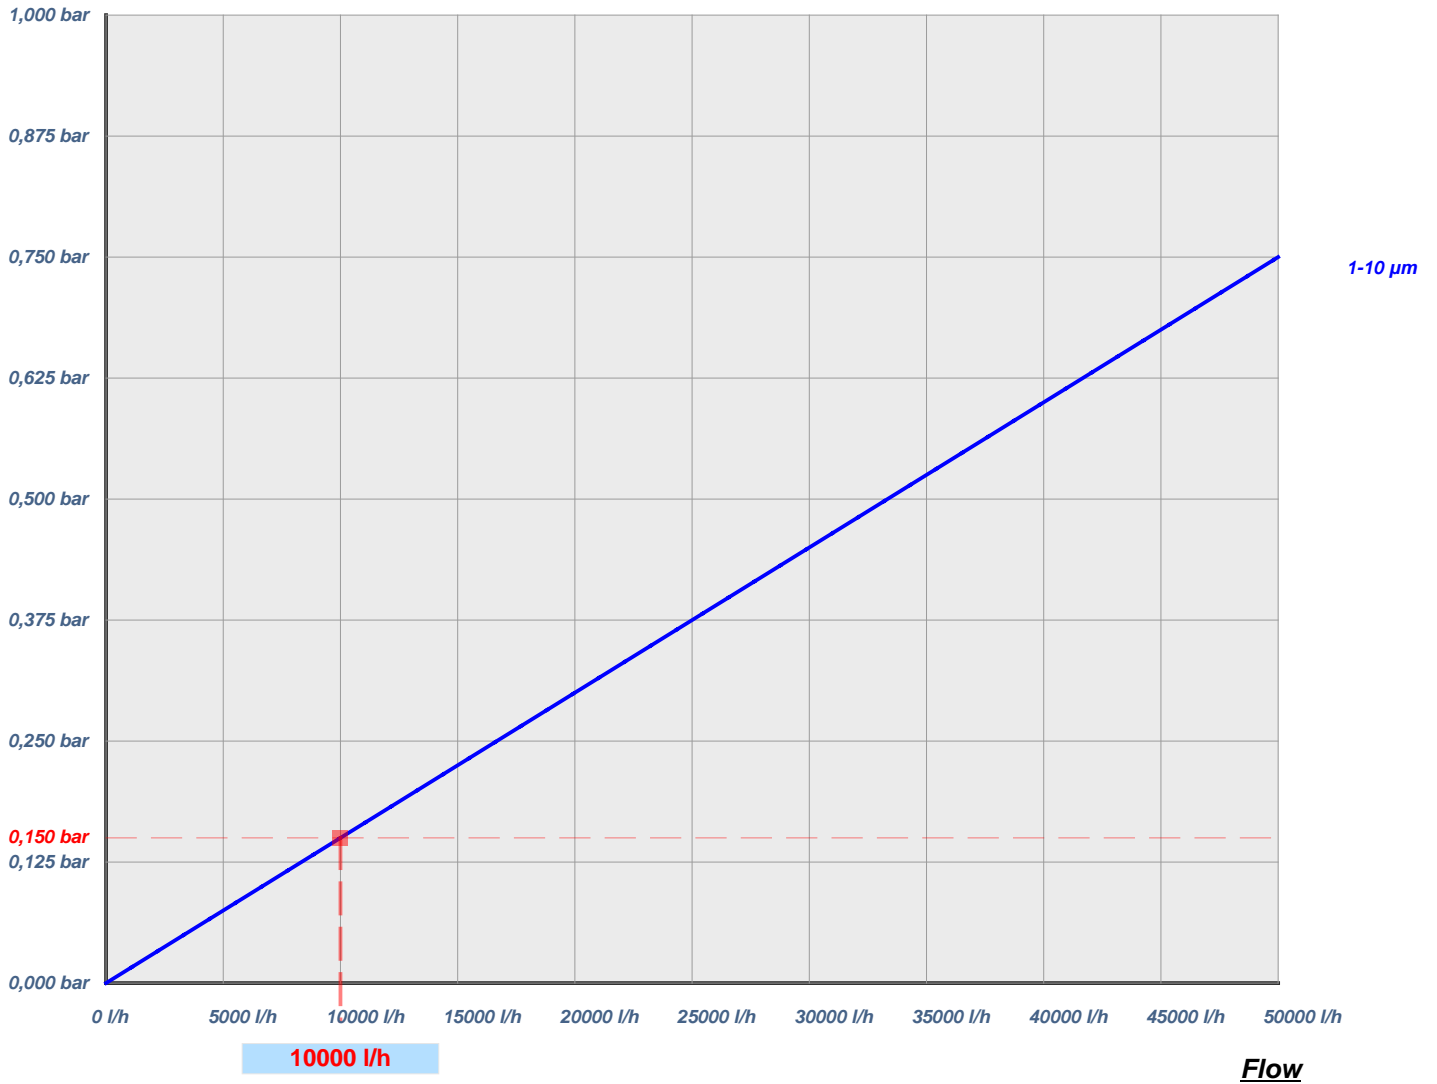

Graphic refers to 23" height cartridges. Make the correct proportion to obtain flow for taller cartridges.