

Depth filtration cartridges

POLYPROPYLENE MELT BLOWN CARTRIDGE

N99F

[Download technical drawing PDF](#) 

TECHNICAL FEATURES

Type	N99F
Type	Melt Blown
Height	9" 3/4
Micron	1
Efficiency	99.98%
Hot sanitizing	No

MATERIAL

Filtration material	Polypropylene
Internal core	Polypropylene
External core	None

PRESSURE

Max differential pressure at 20°C	2 bar
Recommended change-out differential pressure	1 bar

TEMPERATURE

Max working temperature	80°C
-------------------------	------

SCOPE OF USE

Water
Sea water



Approximate picture. End caps and height's choice will lead to the assembly of a product which could differ from those shown in figure

Code	Height	Micron	Flow l/h	Filtering surface	Quantity box	Euro/each
N99F0901ST	9" 3/4	1	400	0,05 m ²	60	Login

Depth filtration cartridges

POLYPROPYLENE MELT BLOWN CARTRIDGE

N99F

END CAPS LIST

End Caps	DOE (Standard)
CODE	ST



CARTRIDGES CODE LIST

Model	Height	Micron	Connection	Seals
N99F	9" 3/4 09	1 01	DOE (Standard) ST	


Depth filtration cartridges

POLYPROPYLENE MELT BLOWN CARTRIDGE

N99F

FLOW RATE VS PRESSURE DIFFERENTIAL

Pressure differential

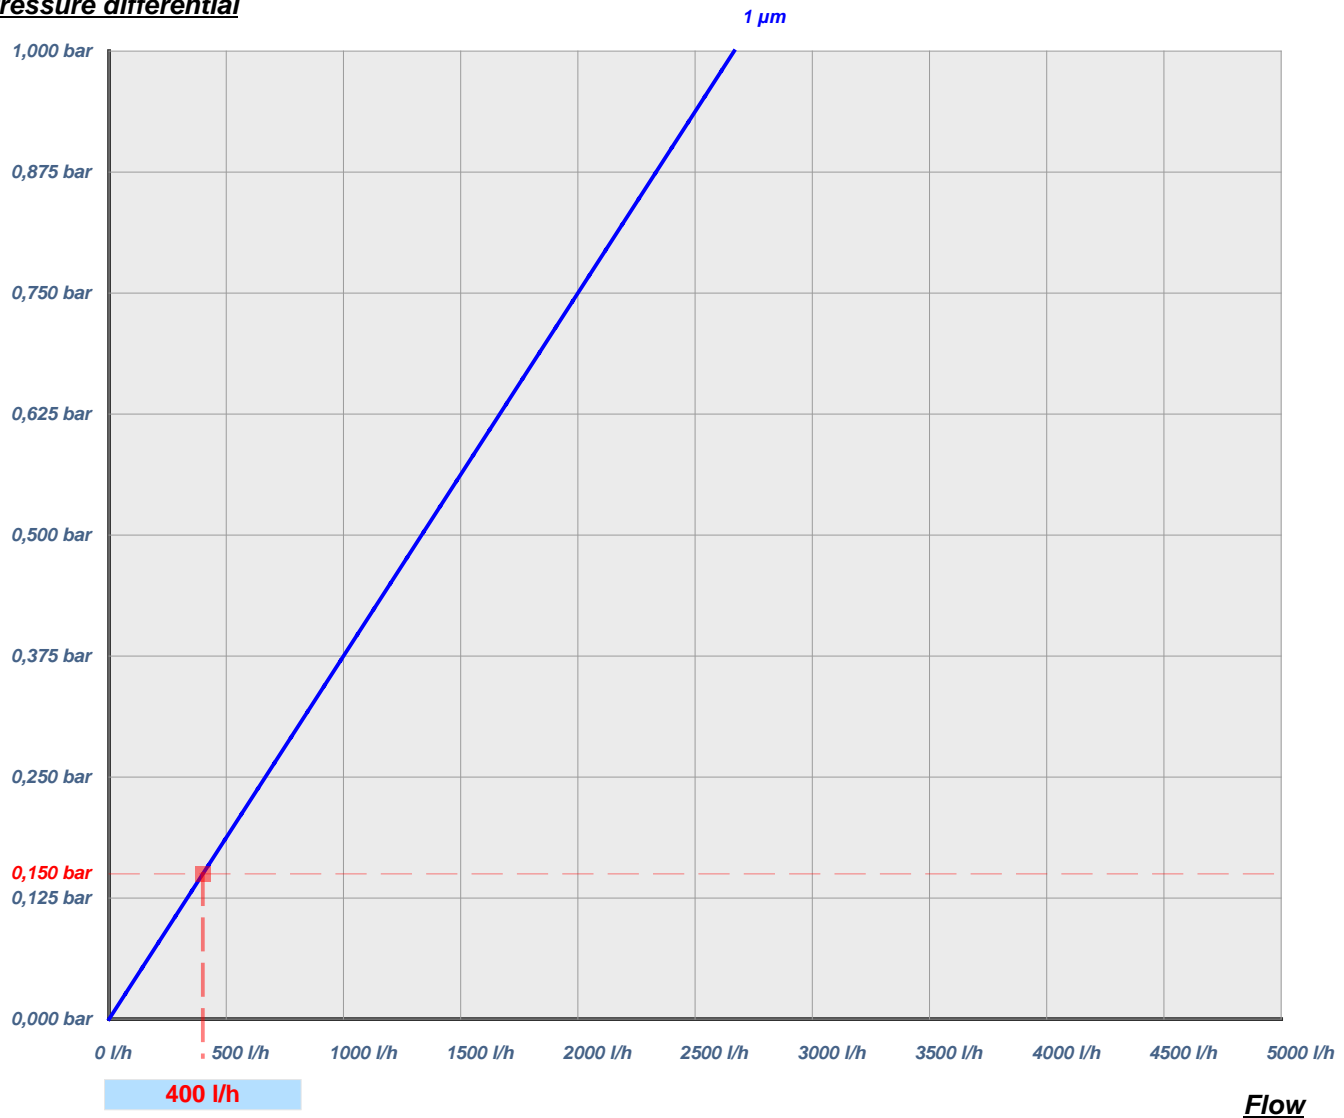

Graphic refers to 9" 3/4 height cartridges. Make the correct proportion to obtain flow for taller cartridges.