

## Pleated filtration cartridges

# PLEATED MEMBRANE POLYETHEROSULFONE CARTRIDGE

## PES99G+

[Download technical drawing PDF](#) 

### TECHNICAL FEATURES

Type	PES99G+
Type	Pleated membrane polyethersulfone
Height	9" 3/4
Micron	0.1
Efficiency	99.98%
Hot sanitizing	Yes - Refer to Everblue for technical info

### MATERIAL

Filtration material	Polyethersulfone membran
Internal core	Polypropylene
External core	Polypropylene

### PRESSURE


Max differential pressure at 20°C	2 bar
Recommended change-out differential pressure	1 bar

### TEMPERATURE

Max working temperature	82°C
-------------------------	------

### SCOPE OF USE

Water
Sea water

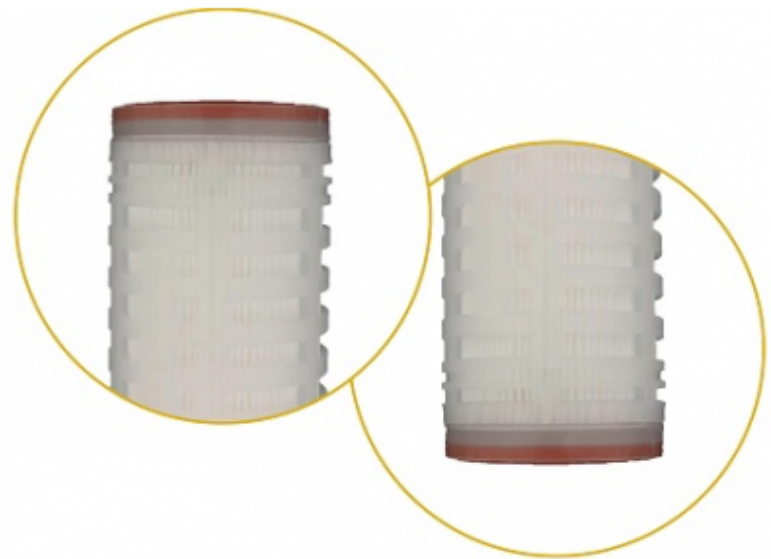

*Approximate picture. End caps and height's choice will lead to the assembly of a product which could differ from those shown in figure*

Code	Height	Micron	Flow l/h	Filtering surface	Minimum quantity	Euro/each
PES99G+09001STS	9" 3/4	0,1	600	0,65 m <sup>2</sup>	4	<a href="#">Login</a>

## Pleated filtration cartridges

# PLEATED MEMBRANE POLYETHEROSULFONE CARTRIDGE

## PES99G+

### END CAPS LIST

End Caps	DOE (Standard)
CODE	ST



### CARTRIDGES CODE LIST

Model	Height		Micron		Connection		Seals	
PES99G+	9" 3/4	09	0,1	001	DOE (Standard)	ST	Silicone	S
							Other available orings	
							EPDM	E
							Viton	V
							PTFE	P

\* standard o-ring


## Pleated filtration cartridges

# PLEATED MEMBRANE POLYETHEROSULFONE CARTRIDGE

## PES99G+

### FLOW RATE VS PRESSURE DIFFERENTIAL

Pressure differential

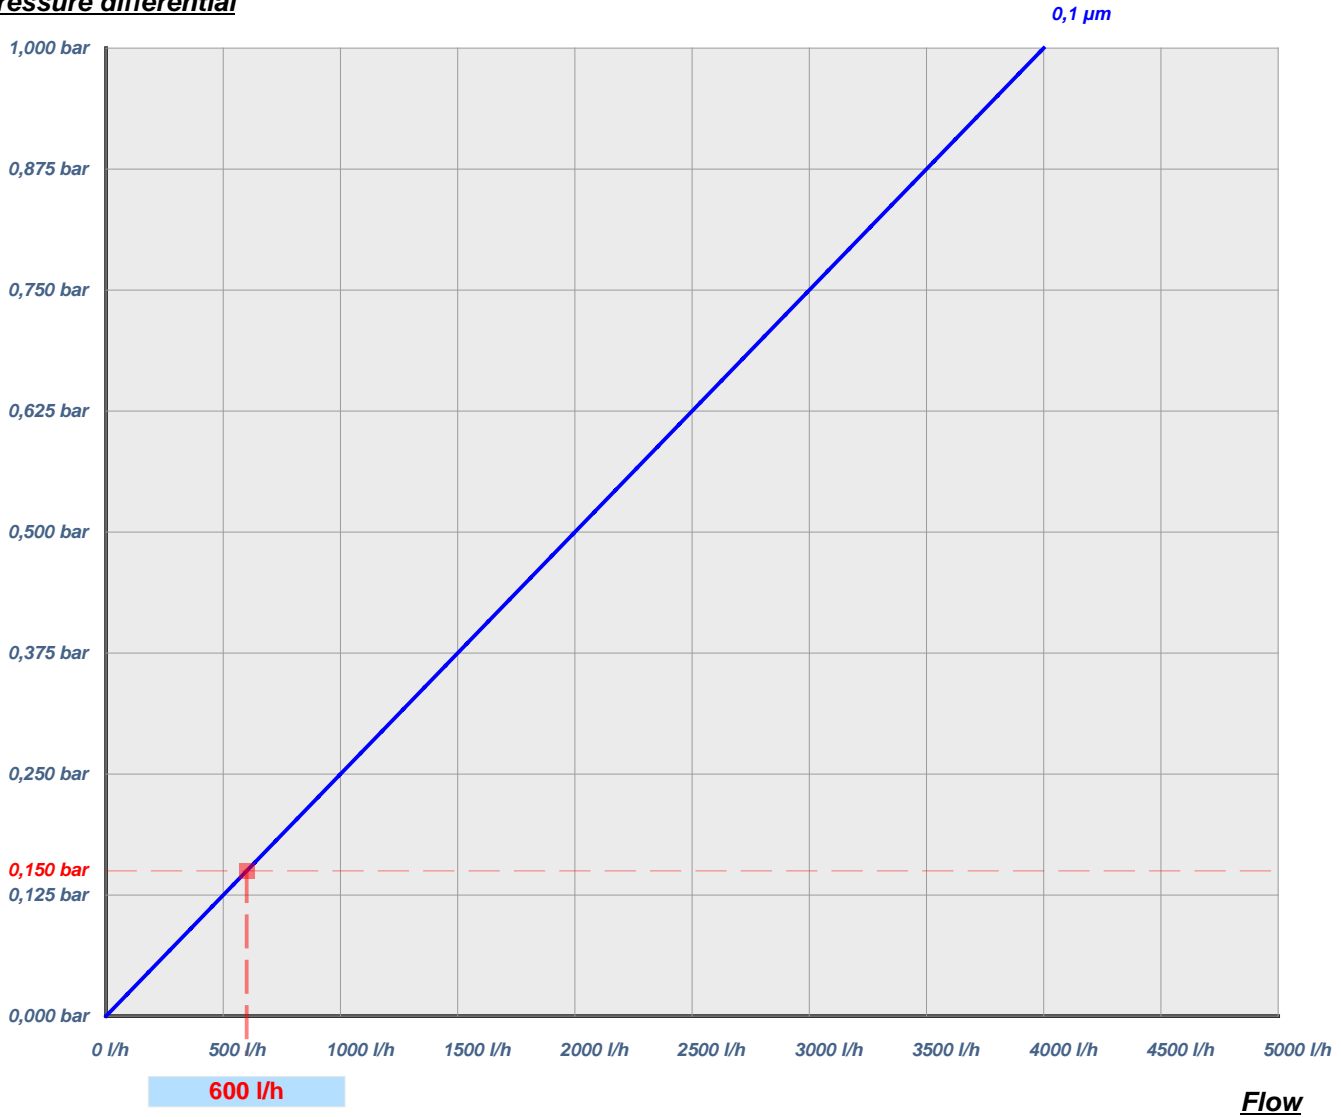

Graphic refers to 9" 3/4 height cartridges. Make the correct proportion to obtain flow for taller cartridges.