

Pleated filtration cartridges

PLEATED POLYPROPYLENE CARTRIDGE

PP85B

[Download technical drawing PDF](#) 

TECHNICAL FEATURES

Type	PP85B
Type	Pleated polypropylene
Height	9" 3/4
Micron	1
Efficiency	85%
Hot sanitizing	No

MATERIAL

Filtration material	Polypropylene
Internal core	Polypropylene
External core	None

PRESSURE

Max differential pressure at 20°C	2 bar
Recommended change-out differential pressure	1 bar

TEMPERATURE

Max working temperature	80°C
-------------------------	------

SCOPE OF USE

Water
Sea water



Approximate picture. End caps and height's choice will lead to the assembly of a product which could differ from those shown in figure

Code	Height	Micron	Flow l/h	Filtering surface	Quantity box	Euro/each
PP85B0901BPVC	9" 3/4	1	1.300	1,17 m ²	10	Login

Pleated filtration cartridges

PLEATED POLYPROPYLENE CARTRIDGE

PP85B

END CAPS LIST

End Caps	DOE BIG
CODE	B



CARTRIDGES CODE LIST

Model	Height	Micron	Connection	Seals
PP85B	9" 3/4 09	1 01	DOE BIG B	PVC PVC

* standard O-ring


Pleated filtration cartridges

PLEATED POLYPROPYLENE CARTRIDGE

PP85B

FLOW RATE VS PRESSURE DIFFERENTIAL

Pressure differential

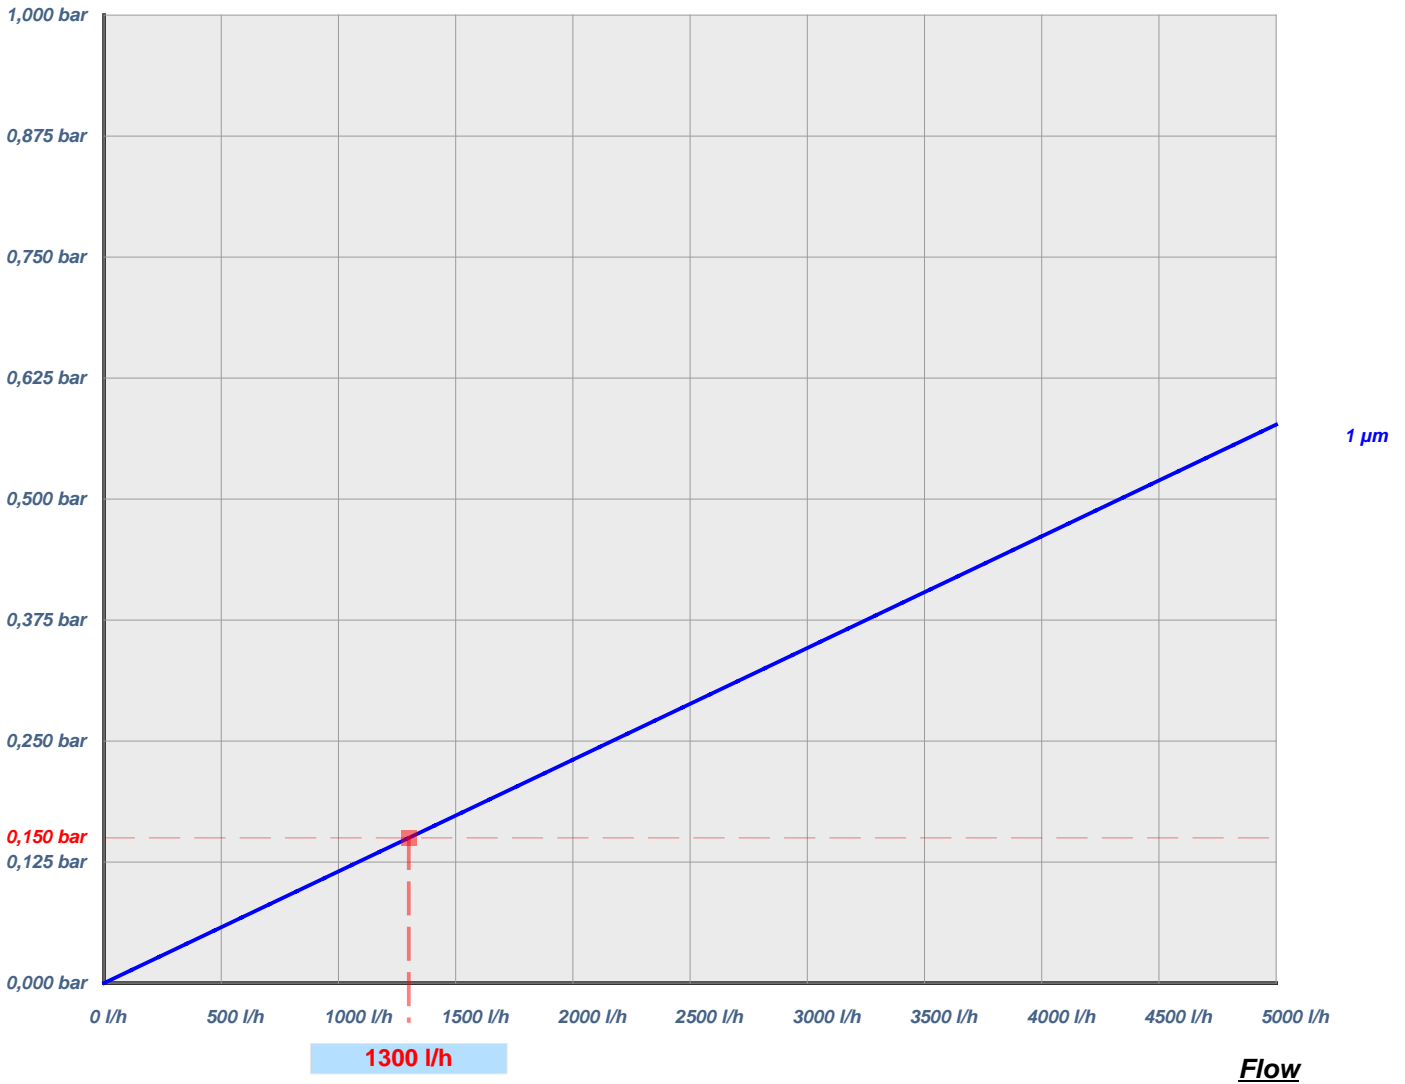

Graphic refers to 9" 3/4 height cartridges. Make the correct proportion to obtain flow for taller cartridges.