

# Pleated filtration cartridges

## PLEATED POLYPROPYLENE CARTRIDGE

### PP95BHF5L

[Download technical drawing PDF](#) 

#### TECHNICAL FEATURES

Type	PP95BHF5L
Type	Pleated polypropylene
Height	9" 3/4
Micron	1
Efficiency	95%
Hot sanitizing	No

#### MATERIAL

Filtration material	Polypropylene
Internal core	Polypropylene
External core	None

#### PRESSURE

Max differential pressure at 20°C	2 bar
Recommended change-out differential pressure	1 bar

#### TEMPERATURE

Max working temperature	80°C
-------------------------	------

#### SCOPE OF USE

Water
Sea water



*Approximate picture. End caps and height's choice will lead to the assembly of a product which could differ from those shown in figure*

Code	Height	Micron	Flow l/h	Filtering surface	Quantity box	Euro/each
PP95BHF5L0901BHFE	9" 3/4	1	3.000	0,50 m <sup>2</sup>	1	<a href="#">Login</a>

## Pleated filtration cartridges

### PLEATED POLYPROPYLENE CARTRIDGE

# PP95BHF5L

#### END CAPS LIST

End Caps	FilterBig
CODE	BHF



#### CARTRIDGES CODE LIST

Model	Height	Micron	Connection	Seals
PP95BHF5L	9" 3/4 09	1 01	FilterBig BHF	EPDM E

\* standard o-ring


## Pleated filtration cartridges

# PLEATED POLYPROPYLENE CARTRIDGE

## PP95BHF5L

### FLOW RATE VS PRESSURE DIFFERENTIAL

#### Pressure differential

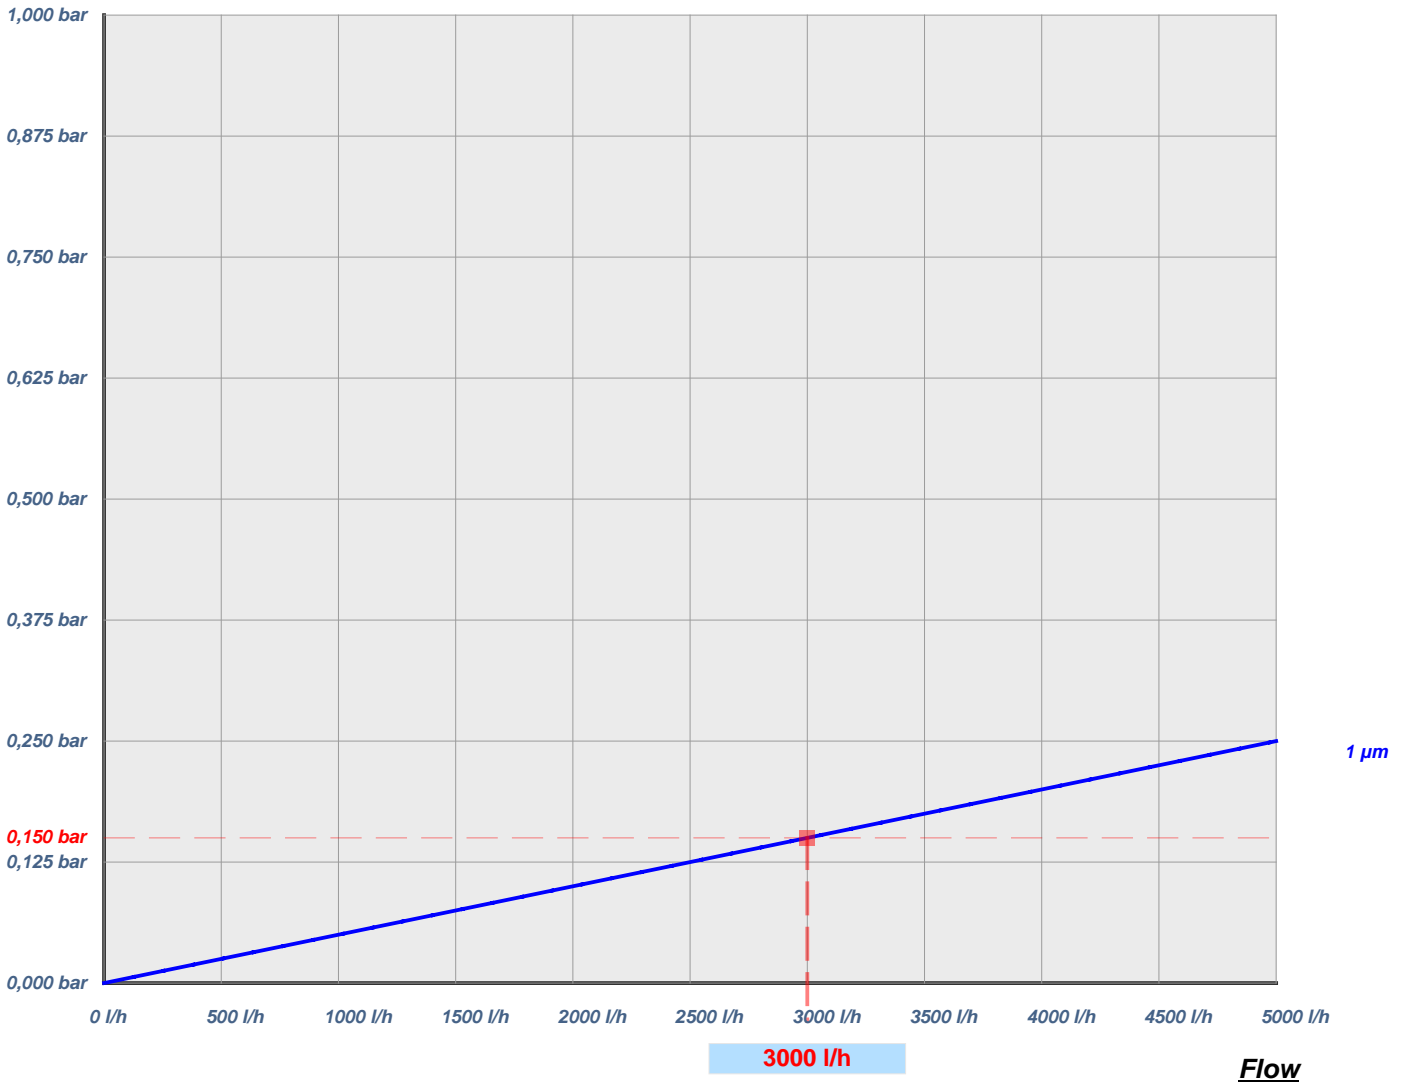

Graphic refers to 9" 3/4 height cartridges. Make the correct proportion to obtain flow for taller cartridges.