

Pleated filtration cartridges

PLEATED POLYPROPYLENE CARTRIDGE

PP95BL5L200

[Download technical drawing PDF](#) 

TECHNICAL FEATURES

Type	PP95BL5L200
Type	Pleated polypropylene
Height	20"
Micron	1
Efficiency	95%
Hot sanitizing	No

MATERIAL

Filtration material	Polypropylene
Internal core	Polypropylene
External core	None

PRESSURE

Max differential pressure at 20°C	2 bar
Recommended change-out differential pressure	1 bar

TEMPERATURE

Max working temperature	50°C
-------------------------	------

SCOPE OF USE

Water
Sea water



Approximate picture. End caps and height's choice will lead to the assembly of a product which could differ from those shown in figure

Code	Height	Micron	Flow l/h	Filtering surface	Quantity box	Euro/each
PP95BL5L2002001BLS	20"	1	12.000	3,40 m ²	1	Login

Pleated filtration cartridges

PLEATED POLYPROPYLENE CARTRIDGE

PP95BL5L200

END CAPS LIST

End Caps	BL
CODE	BL



CARTRIDGES CODE LIST

Model	Height		Micron		Connection		Seals	
PP95BL5L200	20"	20	1	01	BL	BL	Silicone	S
							Other available orings	
							EPDM	E
							NBR	N
							Teflon	T
							Viton	V

* standard O-ring


Pleated filtration cartridges

PLEATED POLYPROPYLENE CARTRIDGE

PP95BL5L200

FLOW RATE VS PRESSURE DIFFERENTIAL

Pressure differential

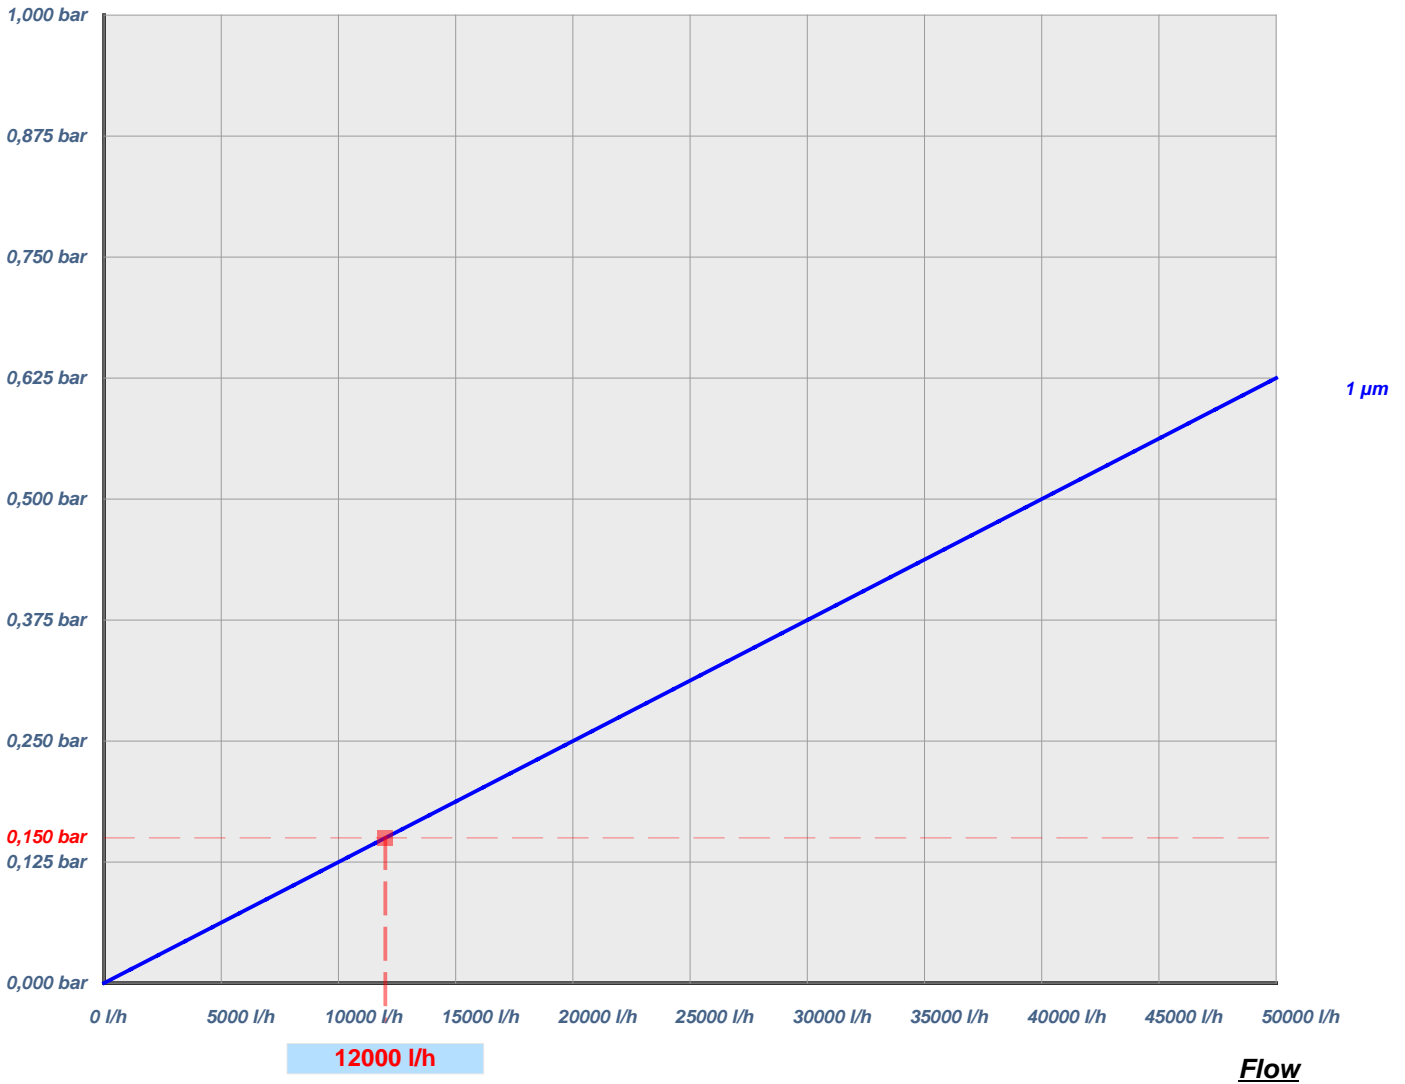

Graphic refers to 20" height cartridges. Make the correct proportion to obtain flow for taller cartridges.