

## Pleated filtration cartridges

# PLEATED POLYPROPYLENE CARTRIDGE

## PP95G+

[Download technical drawing PDF](#) 

### TECHNICAL FEATURES

Type	PP95G+
Type	Pleated polypropylene
Height	9" 3/4
Micron	0.6
Efficiency	95%
Hot sanitizing	No

### MATERIAL

Filtration material	Polypropylene
Internal core	Polypropylene
External core	Polypropylene

### PRESSURE


Max differential pressure at 20°C	2 bar
Recommended change-out differential pressure	1 bar

### TEMPERATURE

Max working temperature	80°C
-------------------------	------

### SCOPE OF USE

Water
Sea water

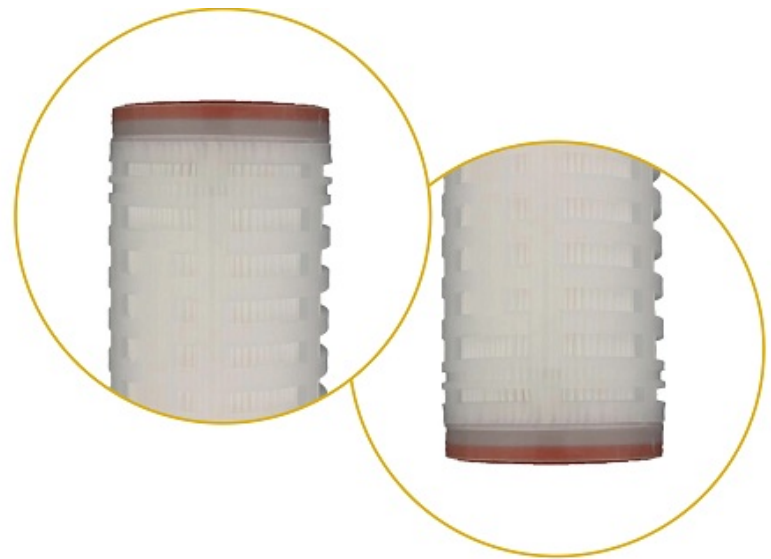

*Approximate picture. End caps and height's choice will lead to the assembly of a product which could differ from those shown in figure*

Code	Height	Micron	Flow l/h	Filtering surface	Quantity box	Euro/each
PP95G+09006STS	9" 3/4	0,6	2.200	0,47 m <sup>2</sup>	10	<a href="#">Login</a>

# Pleated filtration cartridges

## PLEATED POLYPROPYLENE CARTRIDGE

### PP95G+

**END CAPS LIST**

<b>End Caps</b>	DOE (Standard)
CODE	ST



**CARTRIDGES CODE LIST**

Model	Height		Micron		Connection		Seals	
PP95G+	9" 3/4	09	0,6	006	DOE (Standard)	ST	Silicone	S
							Other available orings	
							EPDM	E
							NBR	N
							Teflon	T
							Viton	V

\* standard o-ring


## Pleated filtration cartridges

# PLEATED POLYPROPYLENE CARTRIDGE

## PP95G+

### FLOW RATE VS PRESSURE DIFFERENTIAL

#### Pressure differential

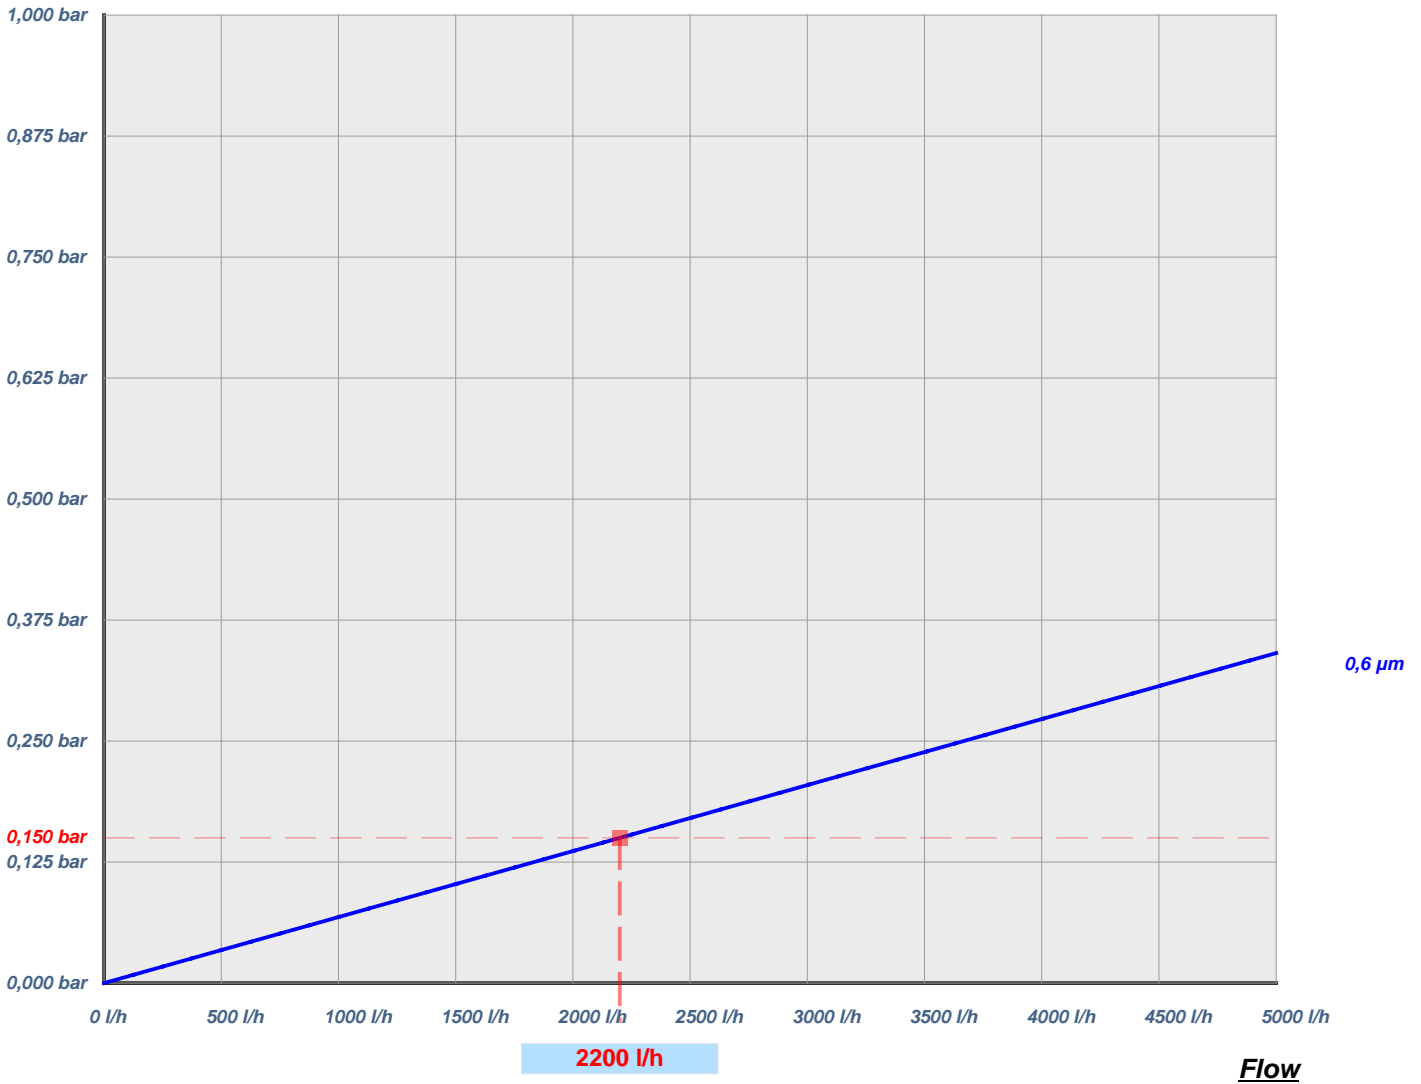

Graphic refers to 9" 3/4 height cartridges. Make the correct proportion to obtain flow for taller cartridges.