

## Pleated filtration cartridges

# PLEATED POLYPROPYLENE CARTRIDGE

## PP95HF5L

[Download technical drawing PDF](#) 

### TECHNICAL FEATURES

Type	PP95HF5L
Type	Pleated polypropylene
Height	20"
Micron	0.5
Efficiency	95%
Hot sanitizing	No

### MATERIAL

Filtration material	Polypropylene
Internal core	Polypropylene
External core	Polypropylene

### PRESSURE

Max differential pressure at 20°C	2 bar
Recommended change-out differential pressure	1 bar

### TEMPERATURE

Max working temperature	50°C
-------------------------	------

### SCOPE OF USE

Water
Sea water



*Approximate picture. End caps and height's choice will lead to the assembly of a product which could differ from those shown in figure*

Code	Height	Micron	Flow l/h	Filtering surface	Quantity box	Euro/each
PP95HF5L20005HFS	20"	0,5	18.000	4,50 m <sup>2</sup>	1	<a href="#">Login</a>

# Pleated filtration cartridges

## PLEATED POLYPROPYLENE CARTRIDGE

### PP95HF5L

#### END CAPS LIST

<b>End Caps</b>	HF
CODE	HF



#### CARTRIDGES CODE LIST

Model	Height		Micron		Connection		Seals	
PP95HF5L	20"	20	0,5	005	HF	HF	Silicone	S
							Other available orings	
							EPDM	E
							NBR	N
							Teflon	T
							Viton	V


\* standard o-ring

# PLEATED POLYPROPYLENE CARTRIDGE

## PP95HF5L

### FLOW RATE VS PRESSURE DIFFERENTIAL

#### Pressure differential

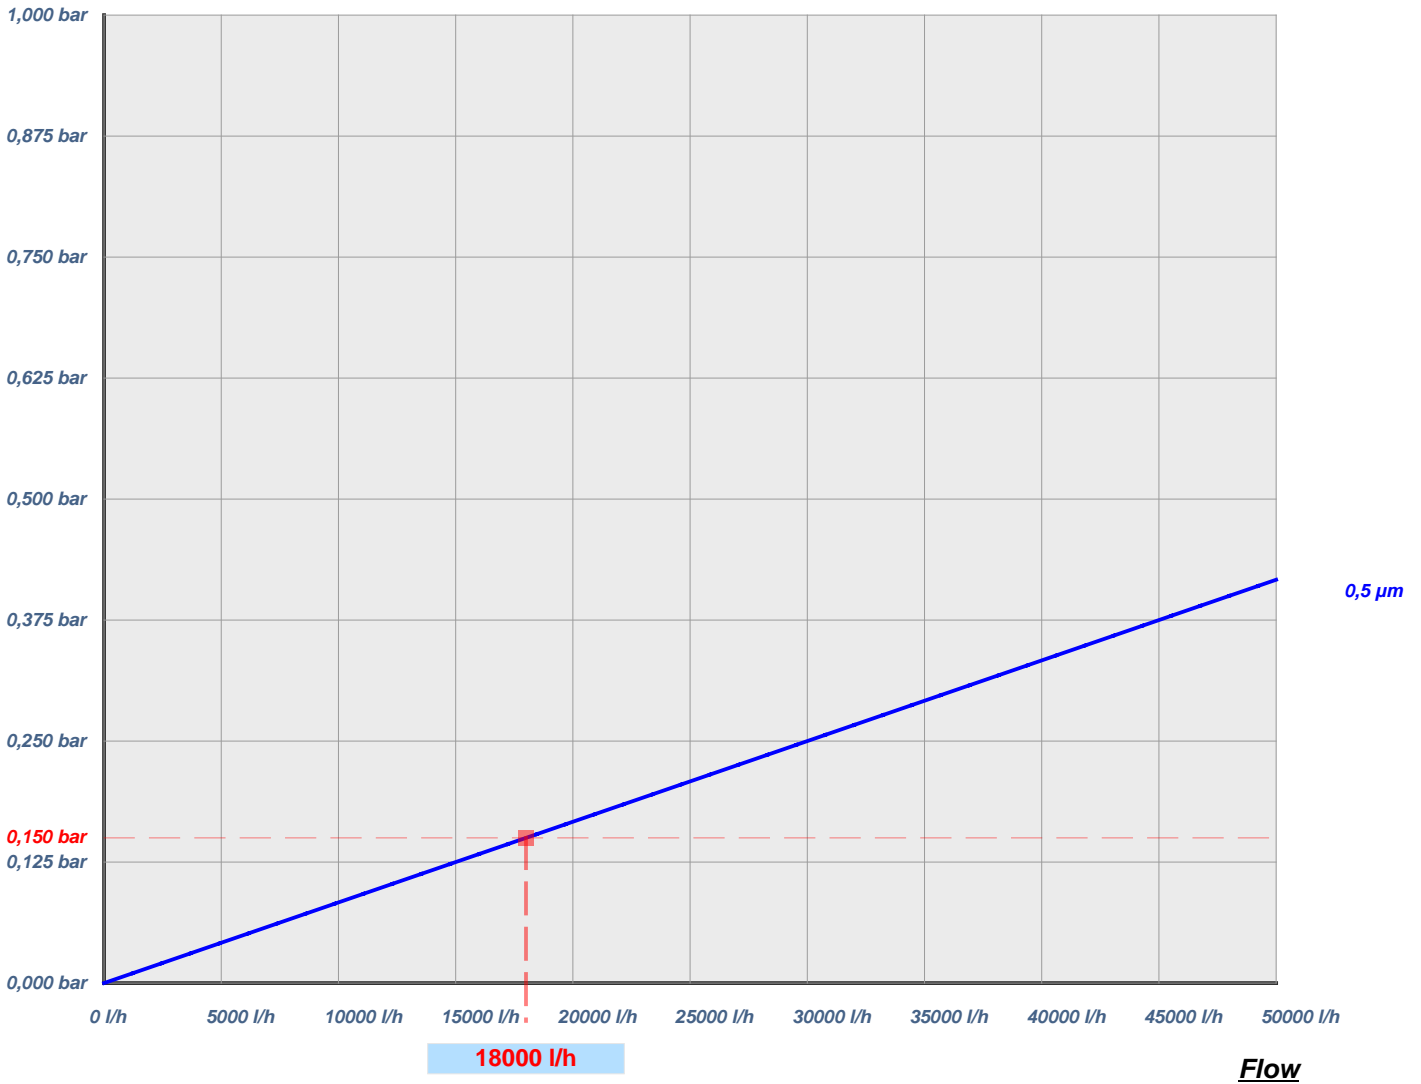

Graphic refers to 20" height cartridges. Make the correct proportion to obtain flow for taller cartridges.