

Pleated filtration cartridges

PLEATED POLYPROPYLENE CARTRIDGE

PP95MX5L

[Download technical drawing PDF](#) 

TECHNICAL FEATURES

Type	PP95MX5L
Type	Pleated polypropylene
Height	13" - 20"
Micron	1 / 5 / 10 / 20 / 50
Efficiency	95%
Hot sanitizing	No

MATERIAL

Filtration material	Polypropylene
Internal core	Polypropylene
External core	Polypropylene

PRESSURE


Max differential pressure at 20°C	2 bar
Recommended change-out differential pressure	1 bar

TEMPERATURE

Max working temperature	50°C
-------------------------	------

SCOPE OF USE

Water
Sea water

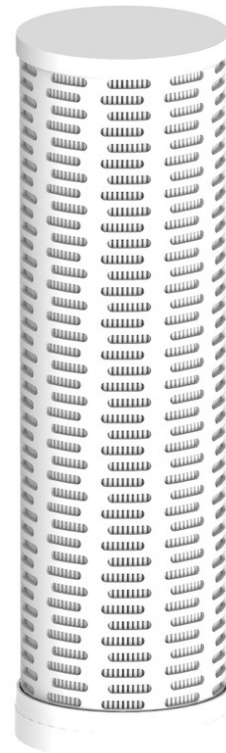

Approximate picture. End caps and height's choice will lead to the assembly of a product which could differ from those shown in figure

Code	Height	Micron	Flow l/h	¹	Filtering surface	Quantity box	Euro/each
PP95MX5L1301MXS	13"	1	12.000		1,80 m ²	1	Login
PP95MX5L1305MXS	13"	5	18.000		1,80 m ²	1	Login
PP95MX5L1310MXS	13"	10	18.000		1,80 m ²	1	Login
PP95MX5L1320MXS	13"	20	18.000		1,80 m ²	1	Login
PP95MX5L1350MXS	13"	50	18.000		1,80 m ²	1	Login
PP95MX5L2001MXS	20"	1	18.000		2,80 m ²	1	Login
PP95MX5L2005MXS	20"	5	27.000		2,80 m ²	1	Login
PP95MX5L2010MXS	20"	10	27.000		2,80 m ²	1	Login
PP95MX5L2020MXS	20"	20	27.000		2,80 m ²	1	Login
PP95MX5L2050MXS	20"	50	27.000		2,80 m ²	1	Login

PLEATED POLYPROPYLENE CARTRIDGE

PP95MX5L

1 Max water flow rate at 20°C and differential pressure 0,15 bar

END CAPS LIST

End Caps	MX
CODE	MX



CARTRIDGES CODE LIST

Model	Height		Micron		Connection		Seals	
PP95MX5L	13"	13	1	01	MX	MX	Silicone	S
	20"	20	5	05				
			10	10				
			20	20				
			50	50				

* standard o-ring


Pleated filtration cartridges

PLEATED POLYPROPYLENE CARTRIDGE

PP95MX5L

FLOW RATE VS PRESSURE DIFFERENTIAL

Pressure differential

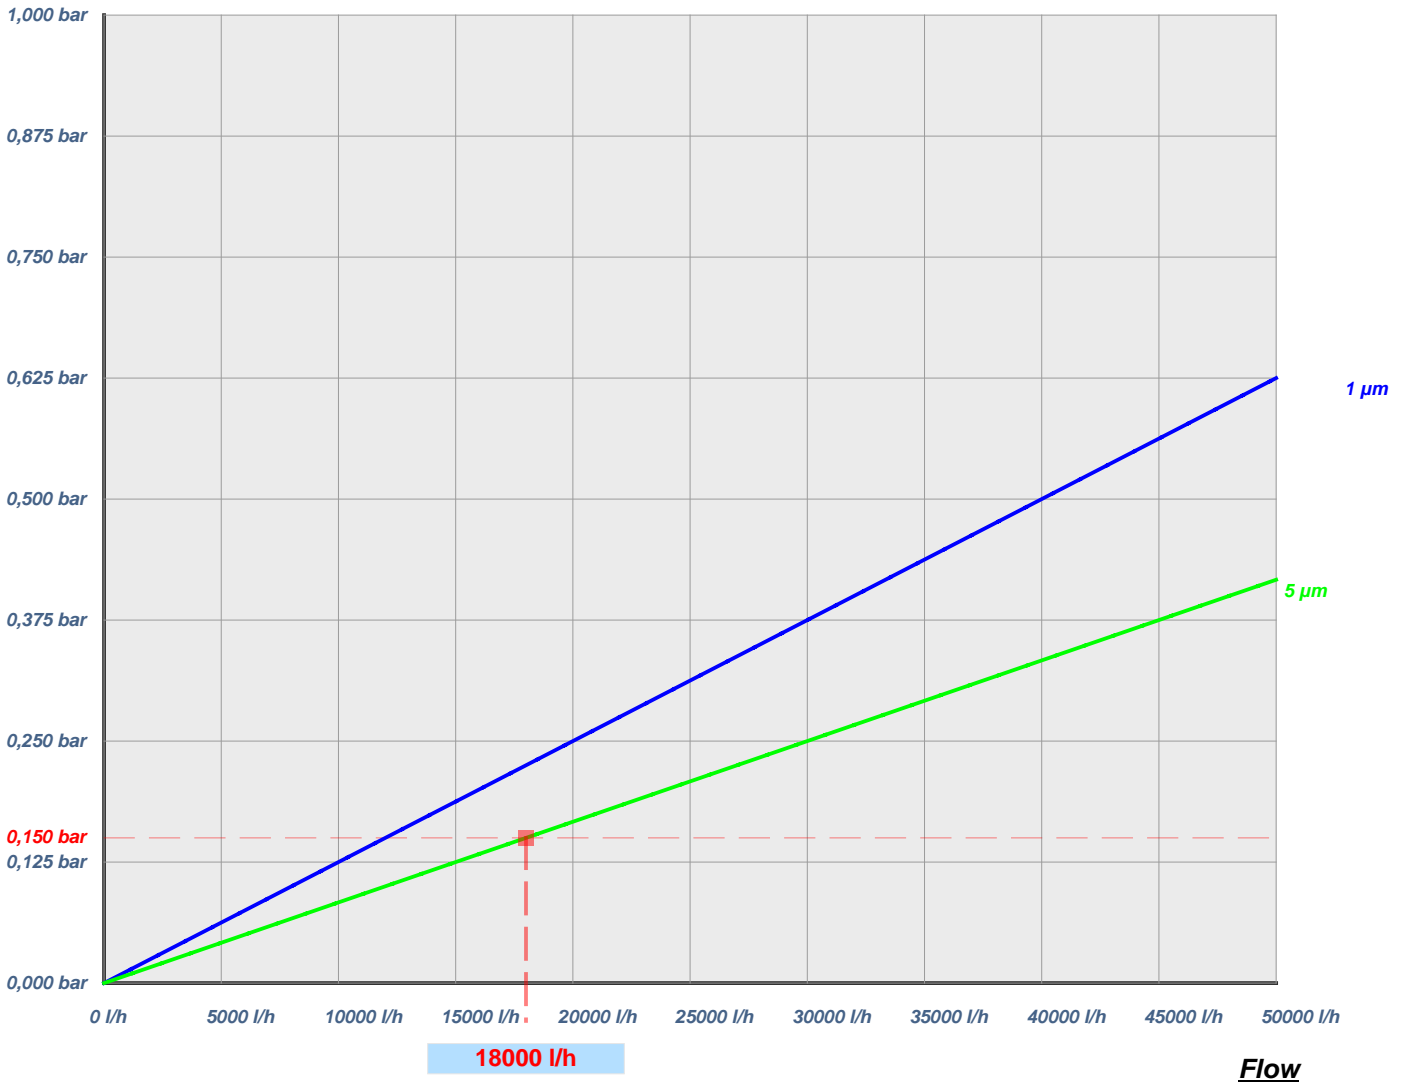

Graphic refers to 13" height cartridges. Make the correct proportion to obtain flow for taller cartridges.