

# Washable filtration cartridges

## WASHABLE NYLON NET CARTRIDGE

### RLA75

[Download technical drawing PDF](#) 

#### TECHNICAL FEATURES

Type	RLA75
Type	Washable net
Height	9" 3/4 - 20"
Micron	80
Efficiency	75%
Hot sanitizing	No

#### MATERIAL

Filtration material	Nylon net
Internal core	None
External core	Polypropylene

#### PRESSURE

Max differential pressure at 20°C	2 bar
Recommended change-out differential pressure	1 bar

#### TEMPERATURE

Max working temperature	80°C
-------------------------	------

#### SCOPE OF USE

Water
Sea water



*Approximate picture. End caps and height's choice will lead to the assembly of a product which could differ from those shown in figure*

Code	Height <sup>2</sup>	Micron	Flow l/h <sup>1</sup>	Filtering surface	Quantity box	Euro/each
RLA750980STPVC	9" 3/4	80	3.500	0,05 m <sup>2</sup>	70	<a href="#">Login</a>
RLA752080STPVC	20"	80	7.000	0,10 m <sup>2</sup>	35	<a href="#">Login</a>

<sup>1</sup> Max water flow rate at 20°C and differential pressure 0,15 bar

<sup>2</sup> 20" model is composed by n. 2 elements 9"3/4

## Washable filtration cartridges

# WASHABLE NYLON NET CARTRIDGE

## RLA75

### END CAPS LIST

End Caps	DOE (Standard)
CODE	ST



### CARTRIDGES CODE LIST

Model	Height	Micron	Connection	Seals
RLA75	9" 3/4 20"	80    80	DOE (Standard)    ST	PVC    PVC

\* standard o-ring


# Washable filtration cartridges

## WASHABLE NYLON NET CARTRIDGE

### RLA75

#### FLOW RATE VS PRESSURE DIFFERENTIAL

##### Pressure differential

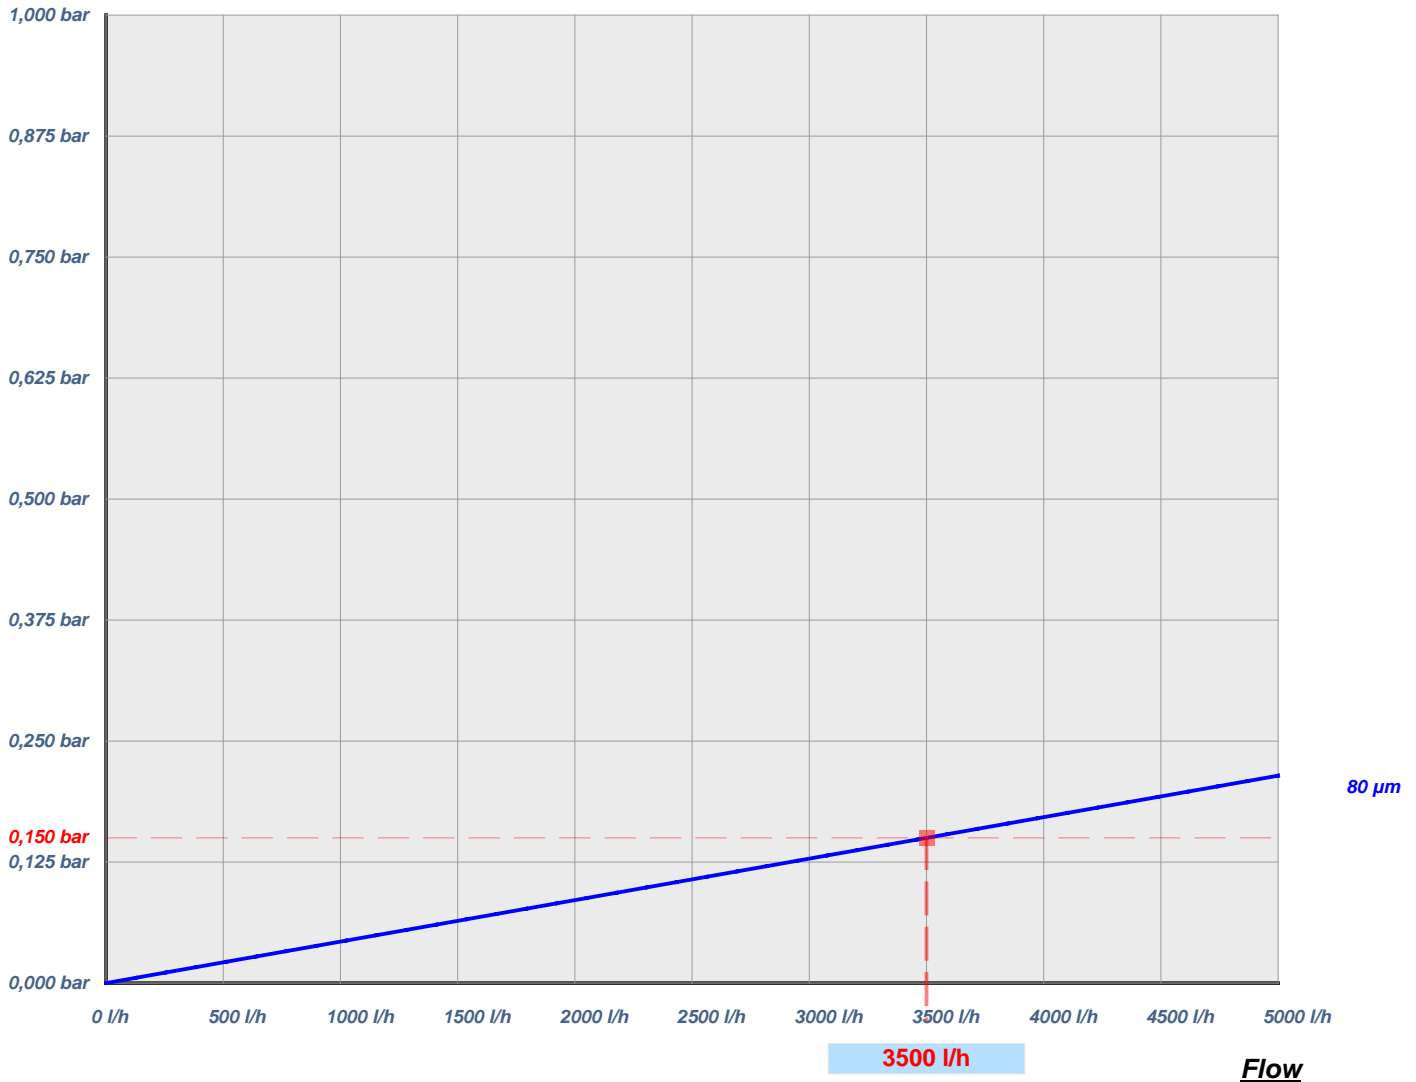

Graphic refers to 9" 3/4 height cartridges. Make the correct proportion to obtain flow for taller cartridges.