

# Washable filtration cartridges

## WASHABLE NYLON NET CARTRIDGE

### RLA75B

[Download technical drawing PDF](#) 

#### TECHNICAL FEATURES

Type	RLA75B
Type	Washable net
Height	9" 3/4 - 20"
Micron	80
Efficiency	75%
Hot sanitizing	No

#### MATERIAL

Filtration material	Nylon net
Internal core	None
External core	Polypropylene

#### PRESSURE

Max differential pressure at 20°C	2 bar
Recommended change-out differential pressure	1 bar

#### TEMPERATURE

Max working temperature	80°C
-------------------------	------

#### SCOPE OF USE

Water
Sea water



*Approximate picture. End caps and height's choice will lead to the assembly of a product which could differ from those shown in figure*

Code	Height	Micron	Flow l/h	<sup>1</sup>	Filtering surface	Quantity box	Euro/each
RLA75B0980BPVC	9" 3/4	80	3.000		0,09 m <sup>2</sup>	6	<a href="#">Login</a>
RLA75B2080BPVC	20"	80	6.000		0,18 m <sup>2</sup>	6	<a href="#">Login</a>

<sup>1</sup> Max water flow rate at 20°C and differential pressure 0,15 bar

## Washable filtration cartridges

# WASHABLE NYLON NET CARTRIDGE

## RLA75B

### END CAPS LIST

<b>End Caps</b>	DOE BIG
CODE	B



### CARTRIDGES CODE LIST

Model	Height	Micron	Connection	Seals
RLA75B	9" 3/4 20"	80      80	DOE BIG      B	PVC      PVC

\* standard O-ring


# Washable filtration cartridges

## WASHABLE NYLON NET CARTRIDGE

### RLA75B

#### FLOW RATE VS PRESSURE DIFFERENTIAL

##### Pressure differential

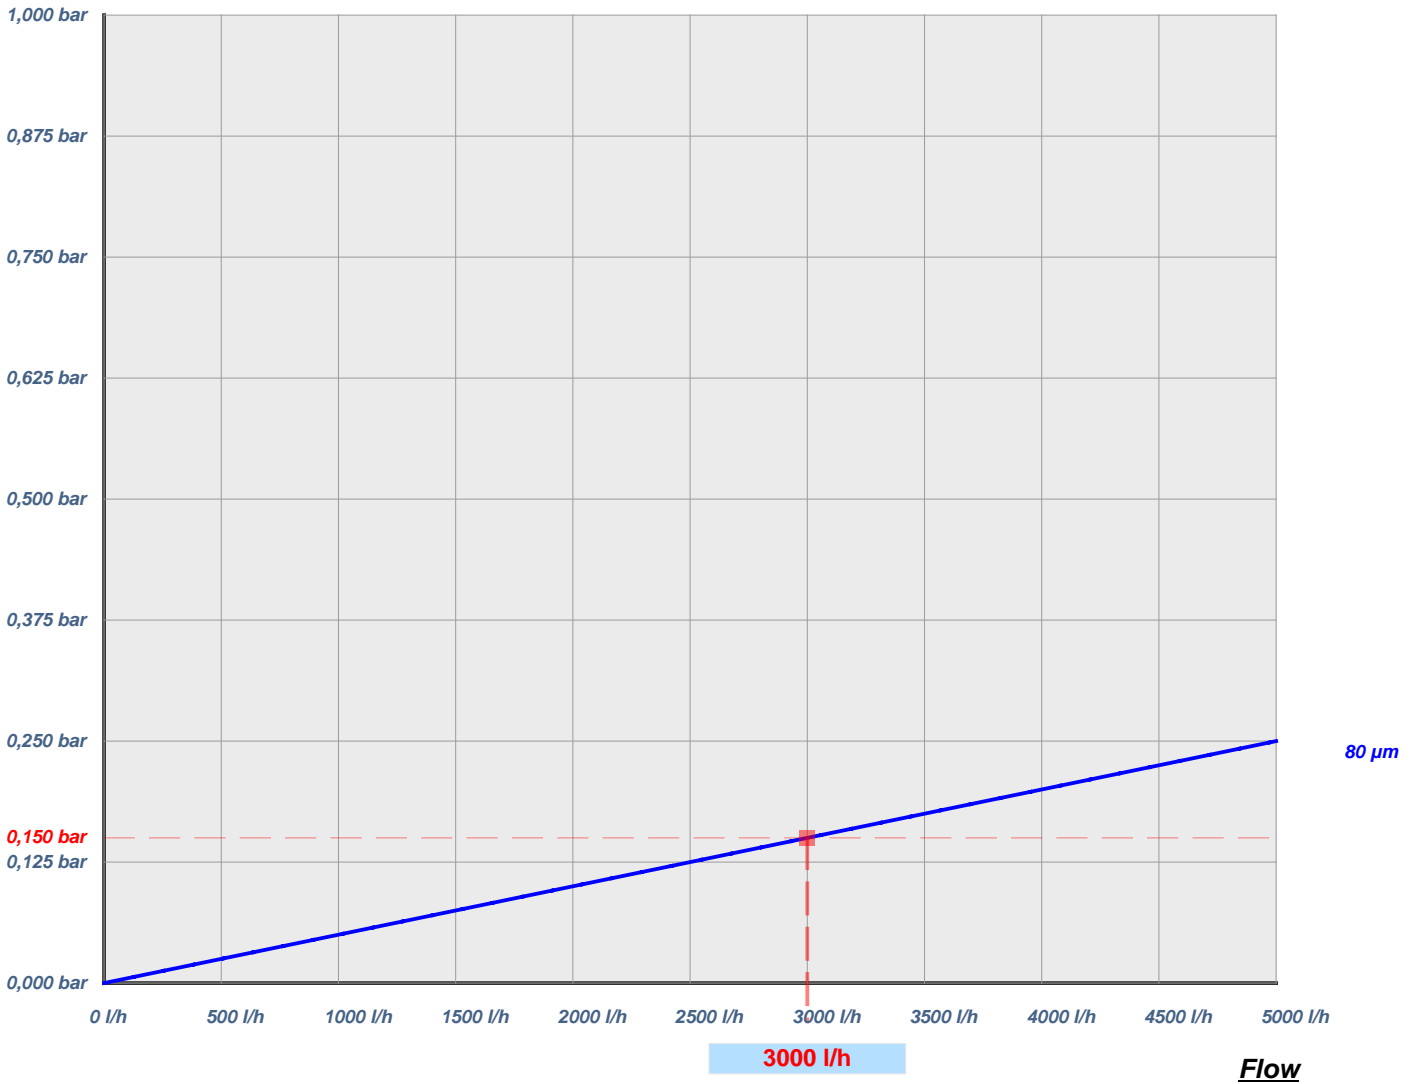

Graphic refers to 9" 3/4 height cartridges. Make the correct proportion to obtain flow for taller cartridges.