

Washable filtration cartridges

PLEATED POLYESTER NET CARTRIDGE

TPL95BHF

[Download technical drawing PDF](#) 

TECHNICAL FEATURES

Type	TPL95BHF
Type	Pleated polyester sleeve
Height	9" 3/4 - 20"
Micron	20 / 50
Efficiency	95%
Hot sanitizing	No

MATERIAL

Filtration material	Polyester
Internal core	Polypropylene
External core	None

PRESSURE

Max differential pressure at 20°C	2 bar
Recommended change-out differential pressure	1 bar

TEMPERATURE

Max working temperature	80°C
-------------------------	------

SCOPE OF USE

Water
Sea water



Approximate picture. End caps and height's choice will lead to the assembly of a product which could differ from those shown in figure

Code	Height	Micron	Flow l/h	¹	Filtering surface	Quantity box	Euro/each
TPL95BHF0920BHFE	9" 3/4	20	4.500		0,50 m ²	1	Login
TPL95BHF0950BHFE	9" 3/4	50	4.500		0,50 m ²	1	Login
TPL95BHF2020BHFE	20"	20	9.000		1,00 m ²	1	Login
TPL95BHF2050BHFE	20"	50	9.000		1,00 m ²	1	Login

¹ Max water flow rate at 20°C and differential pressure 0,15 bar

Washable filtration cartridges

PLEATED POLYESTER NET CARTRIDGE

TPL95BHF

END CAPS LIST

End Caps	FilterBig
CODE	BHF



CARTRIDGES CODE LIST

Model	Height		Micron		Connection		Seals	
TPL95BHF	9" 3/4	09	20	20	FilterBig	BHF	EPDM	E
	20"	20	50	50				

* standard o-ring


Washable filtration cartridges

PLEATED POLYESTER NET CARTRIDGE

TPL95BHF

FLOW RATE VS PRESSURE DIFFERENTIAL

Pressure differential

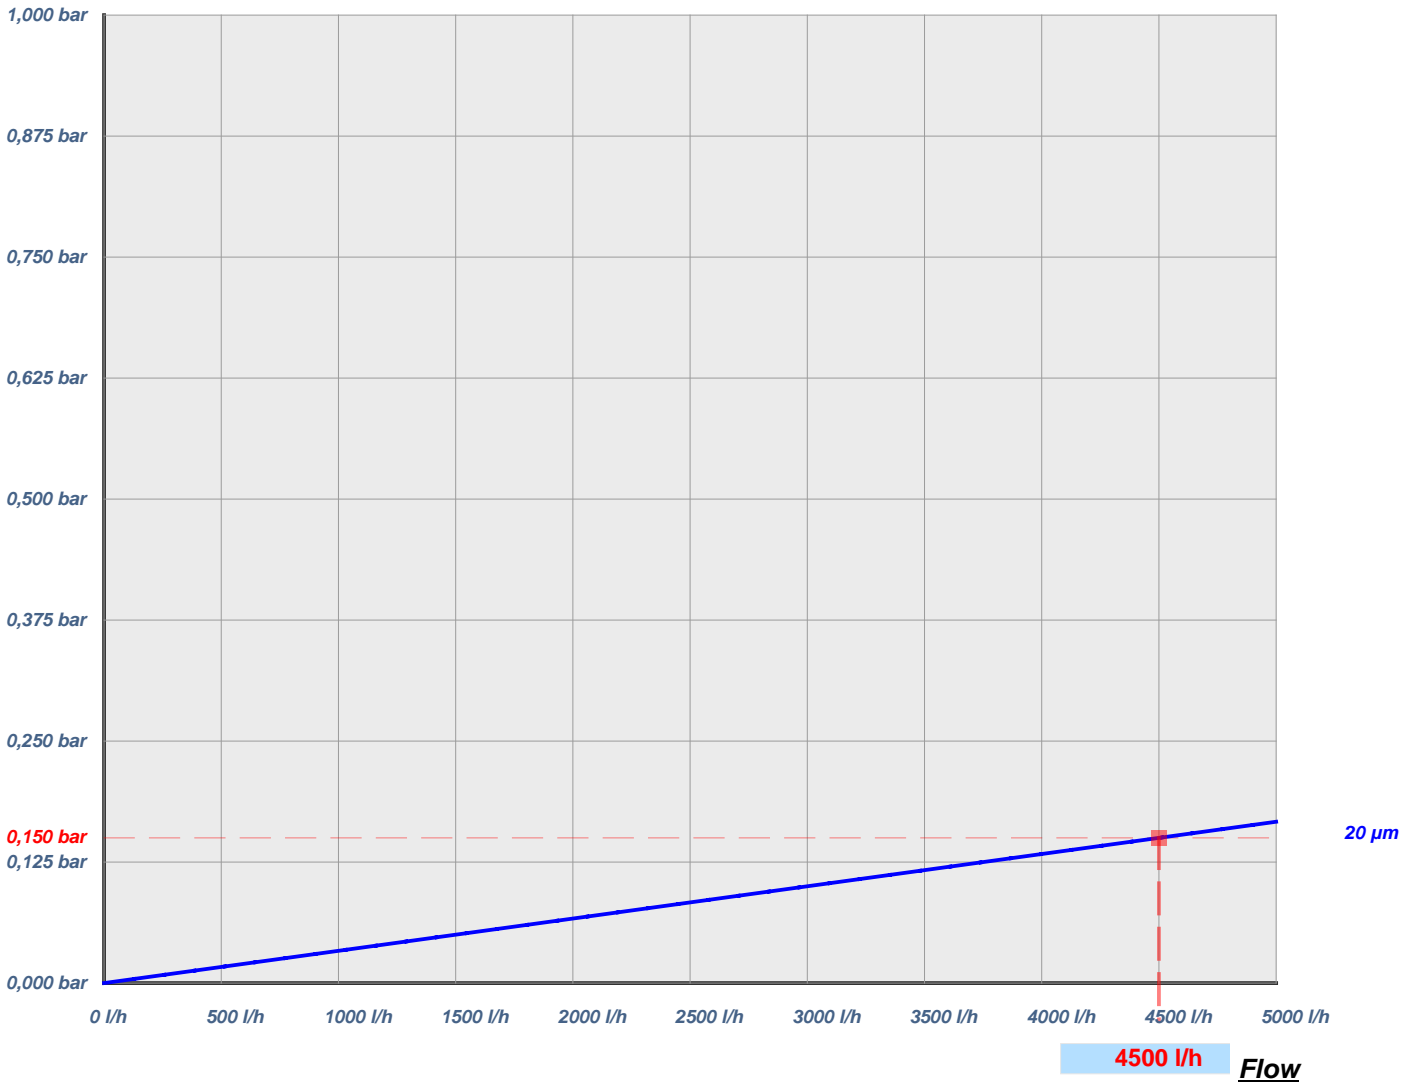

Graphic refers to 9" 3/4 height cartridges. Make the correct proportion to obtain flow for taller cartridges.