

# Washable filtration cartridges

## PLEATED POLYESTER NET CARTRIDGE

### TPL95BLF200

[Download technical drawing PDF](#) 

#### TECHNICAL FEATURES

Type	TPL95BLF200
Type	Pleated polyester sleeve
Height	20"
Micron	20
Efficiency	95%
Hot sanitizing	No

#### MATERIAL

Filtration material	Polyester
Internal core	Polypropylene - FILSTAR INSIDE
External core	None

#### PRESSURE

Max differential pressure at 20°C	3 bar
Recommended change-out differential pressure	1 bar

#### TEMPERATURE

Max working temperature	50°C
-------------------------	------

#### SCOPE OF USE

Water
Sea water



*Approximate picture. End caps and height's choice will lead to the assembly of a product which could differ from those shown in figure*

Code	Height	Micron	Flow l/h	Filtering surface	Quantity box	Euro/each
TPL95BLF2002020BLS	20"	20	18.000	2,52 m <sup>2</sup>	1	<a href="#">Login</a>

## Washable filtration cartridges

# PLEATED POLYESTER NET CARTRIDGE

## TPL95BLF200

### END CAPS LIST

<b>End Caps</b>	BL
CODE	BL



### CARTRIDGES CODE LIST

Model	Height		Micron		Connection		Seals	
TPL95BLF200	20"	20	20	20	BL	BL	Silicone	S
							Other available orings	
							EPDM	E
							NBR	N
							Teflon	T
							Viton	V

\* standard O-ring


# Washable filtration cartridges

## PLEATED POLYESTER NET CARTRIDGE

### TPL95BLF200

#### FLOW RATE VS PRESSURE DIFFERENTIAL

##### Pressure differential

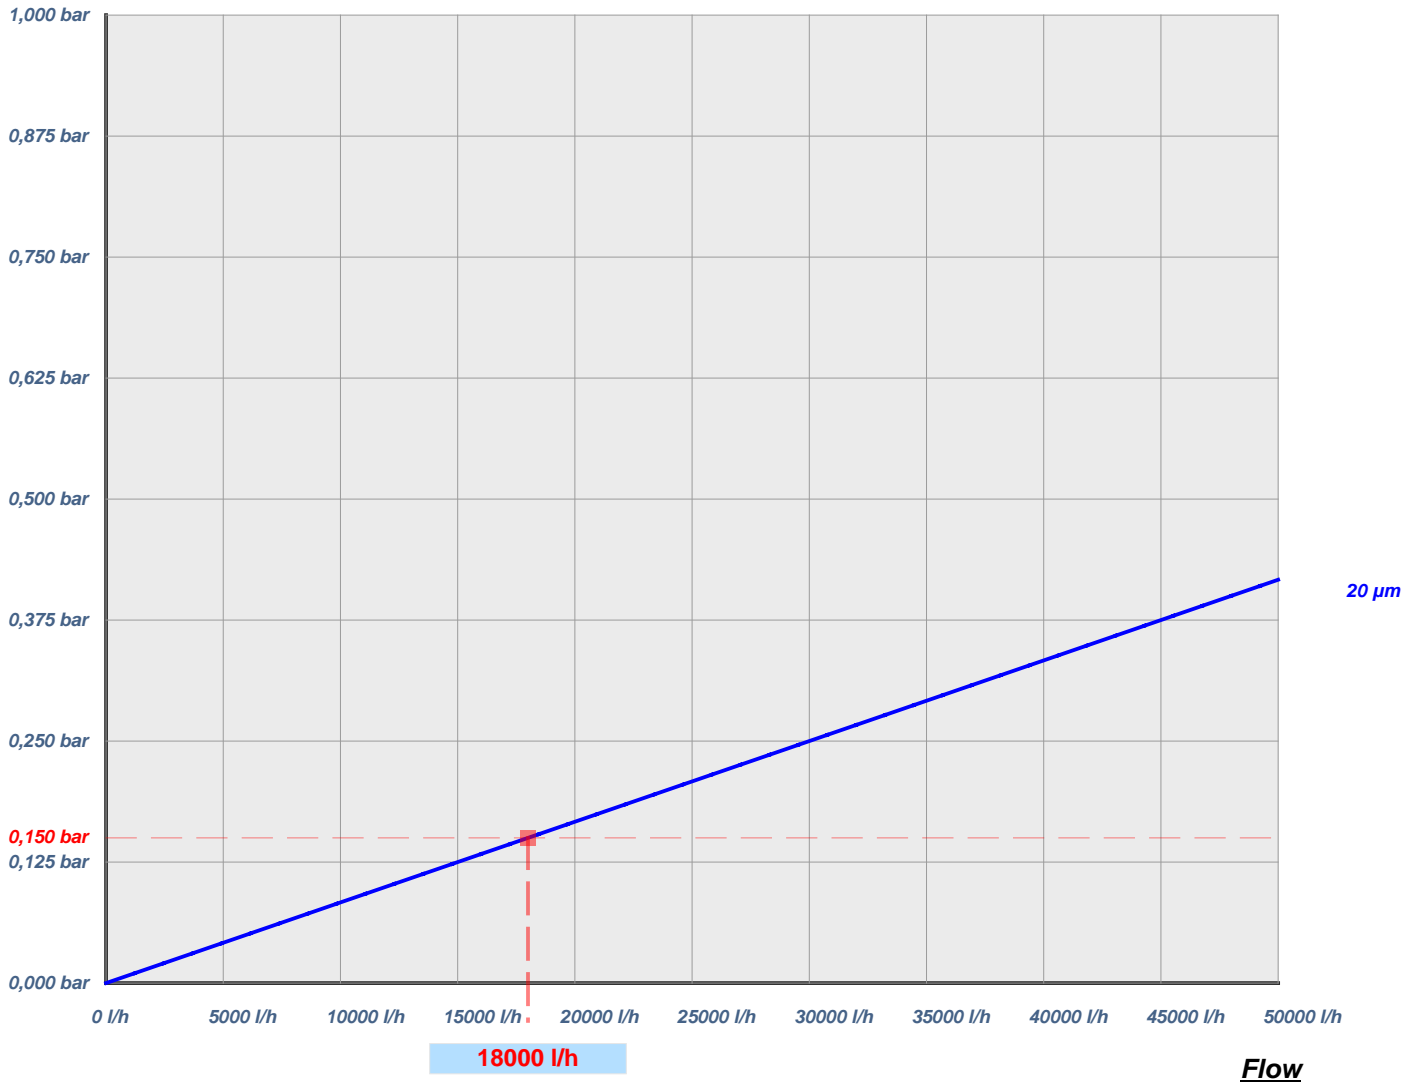

Graphic refers to 20" height cartridges. Make the correct proportion to obtain flow for taller cartridges.