

Washable filtration cartridges

PLEATED POLYESTER NET CARTRIDGE

TPL95MX

[Download technical drawing PDF](#) 

TECHNICAL FEATURES

Type	TPL95MX
Type	Pleated polyester sleeve
Height	13"
Micron	20
Efficiency	95%
Hot sanitizing	No

MATERIAL

Filtration material	Polyester
Internal core	Polypropylene
External core	Polypropylene

PRESSURE

Max differential pressure at 20°C	2 bar
Recommended change-out differential pressure	1 bar

TEMPERATURE

Max working temperature	50°C
-------------------------	------

SCOPE OF USE

Water
Sea water



Approximate picture. End caps and height's choice will lead to the assembly of a product which could differ from those shown in figure

Code	Height	Micron	Flow l/h	Filtering surface	Quantity box	Euro/each
TPL95MX1320MXS	13"	20	18.000	0,70 m ²	1	Login

Washable filtration cartridges

PLEATED POLYESTER NET CARTRIDGE

TPL95MX

END CAPS LIST

End Caps	MX
CODE	MX



CARTRIDGES CODE LIST

Model	Height		Micron		Connection		Seals	
TPL95MX	13"	13	20	20	MX	MX	Silicone	S

* standard o-ring


Washable filtration cartridges

PLEATED POLYESTER NET CARTRIDGE

TPL95MX

FLOW RATE VS PRESSURE DIFFERENTIAL

Pressure differential

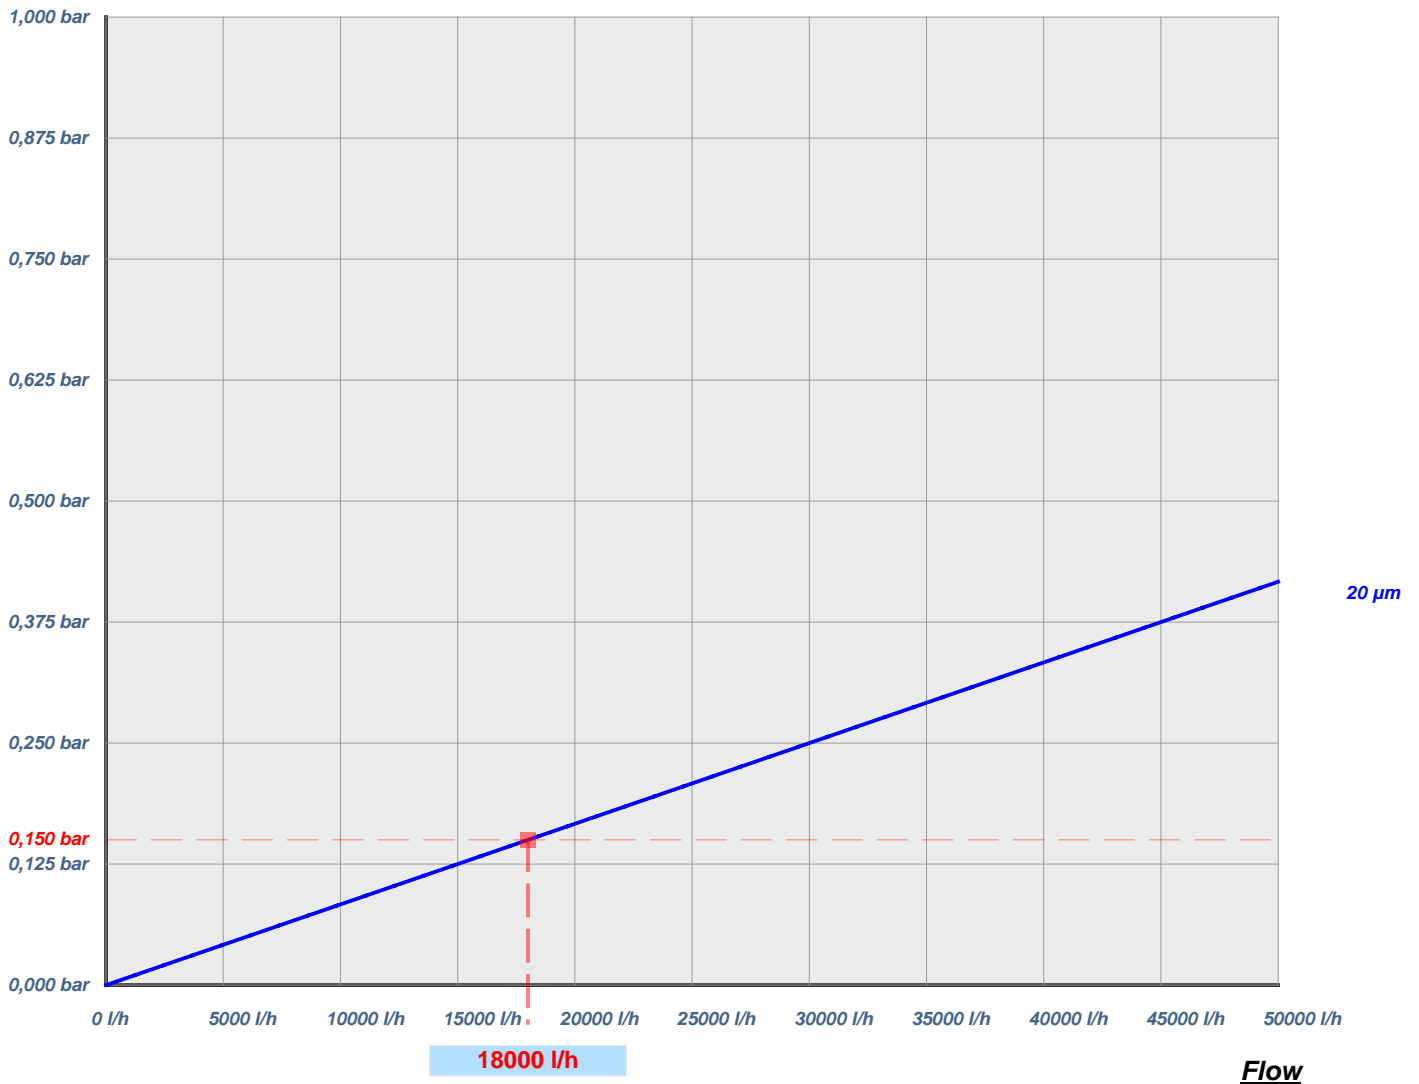

Graphic refers to 13" height cartridges. Make the correct proportion to obtain flow for taller cartridges.